



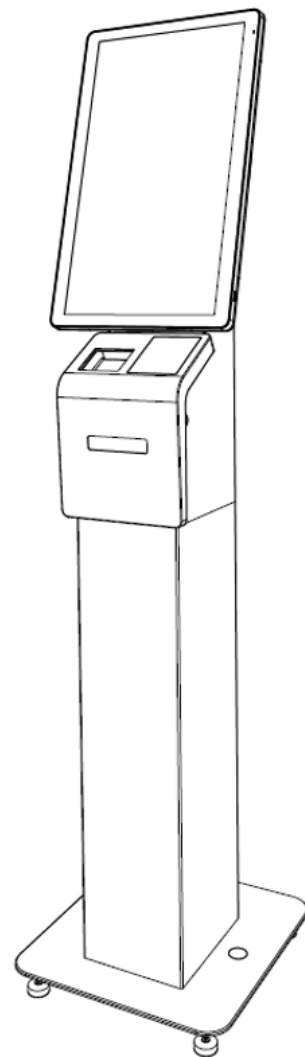

CARE . TRUST . RESPONSIBILITY


# Alfred Kiosk

## A. AD-215F ASSEMBLY INSTRUCTION

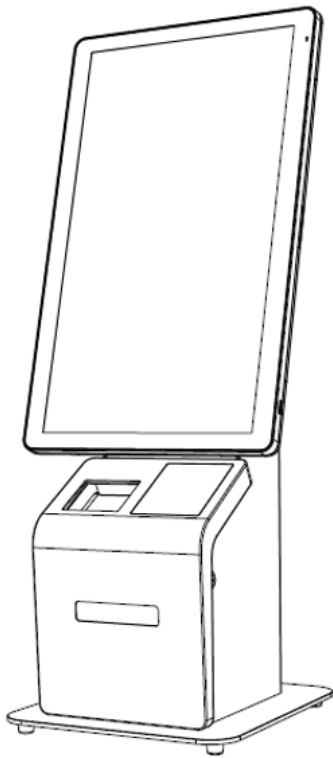


## ※ Installation Part list

Accessory Box (910K19PS11700 _ Counter-top_Stand)		
Item	P/T Part Number	Qty
Rear Cover	25003PS107100	1
TMT-70_Base	N/A	1
RP-700_Linked_bracket	21002500SB004	1
TMT-70_Linked_bracket	25003500SB006	1
Bracket_TMT-70II_plate	N/A	1
Screw_M3x9_with_washer	2101100030601	4 (PE bag)
Umbrella_head_screw_M4x8	2101124040802	5 (PE bag)
Flat_head_screw_M3x4	2101100030405	2 (PE bag)
Free cutting steel_M4x5	2102000040500	2 (PE bag)
Cable Tie	N/A	2 (PE bag)
Lock Key	N/A	1

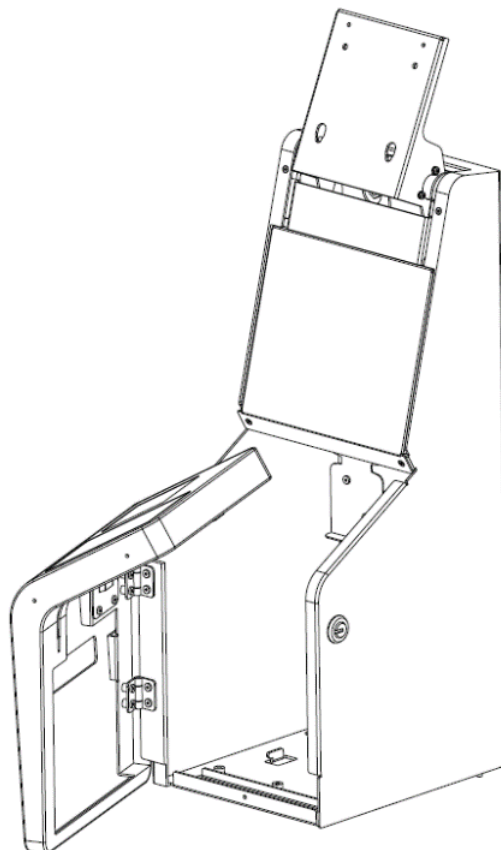


## ※ Installation Part list

Accessory Box (910K19PS11701 Counter-top + Plate)		
Item	P/T Part Number	Qty
Rear Cover	25003PS107100	1
TMT-70_Base	N/A	1
RP-700_Linked_bracket	21002500SB004	1
TMT-70_Linked_bracket	25003500SB006	1
Free cutting steel_M4x5	2102000040500	2 (PE bag)
Screw_M3x9_with_washer	2101100030601	4 (PE bag)
Umbrella_head_screw_M4x8	2101124040802	5 (PE bag)
Flat_head_screw_M3x4	2101100030405	2 (PE bag)
Cable Tie	N/A	2 (PE bag)
Lock Key	N/A	1
Table Base +	21004AD215300	1

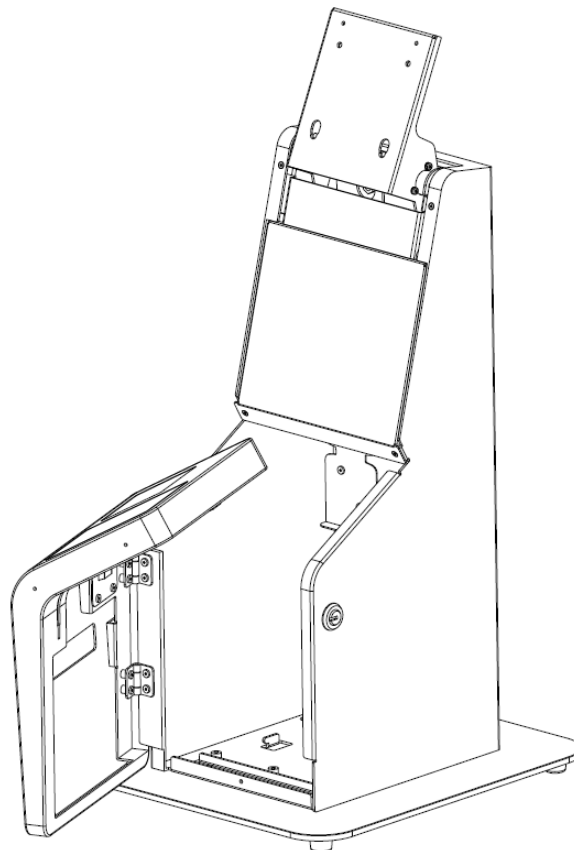


## ※ Installation Part list

Accessory Box (910K19PS12700 _ Counter-top_Plate)		
Item	P/T Part Number	Qty
Hexagon_socket_screw_M6x15	N/A	4 (PE bag)
Lock Key	N/A	1

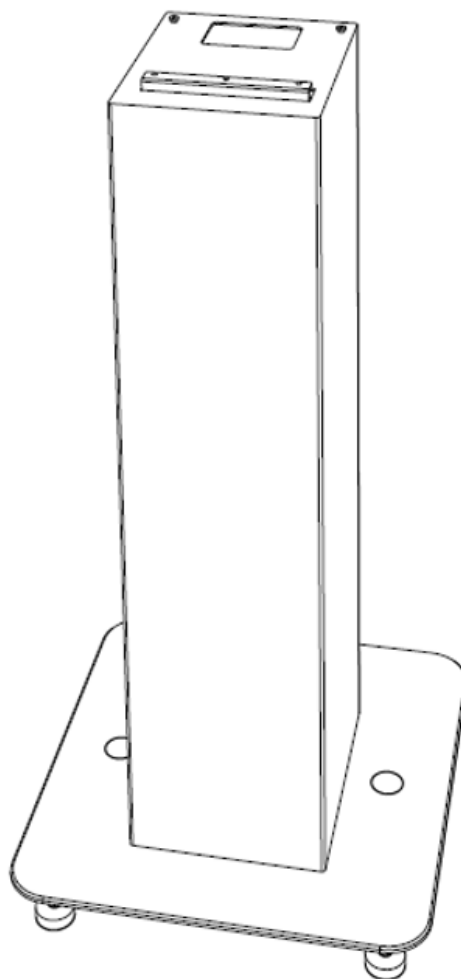


## ※ Installation Part list

Accessory Box (910K19PS12701 Floor_Stand+Wheels)		
Item	P/T Part Number	Qty
Hexagon_Socket_Screw_M6x15	N/A	8 (PE bag)
Wheel_Casters	25003AD215002	1
Handles_A-748		1
Screw_M5x7	N/A	2
Lock Key	N/A	1

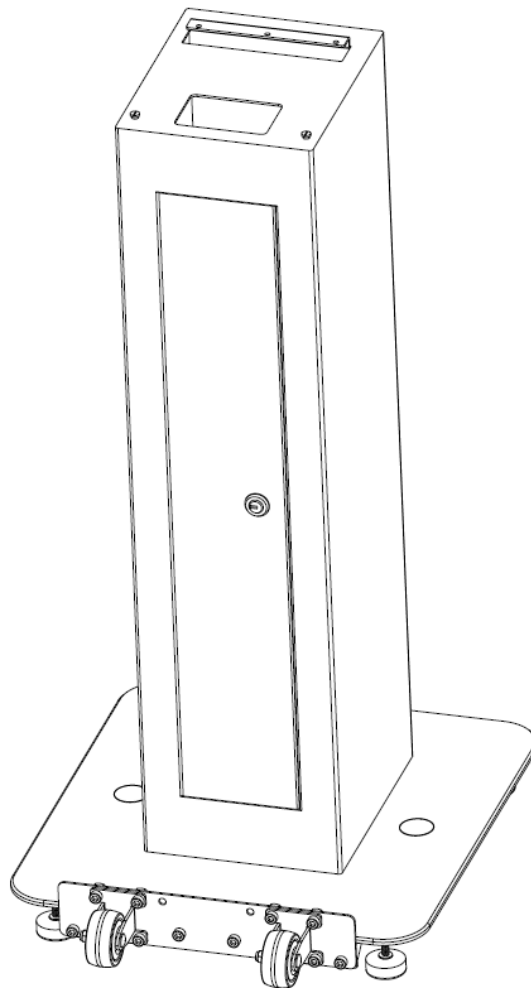


## 1 Unlock And Open the Printer Door With The Key.

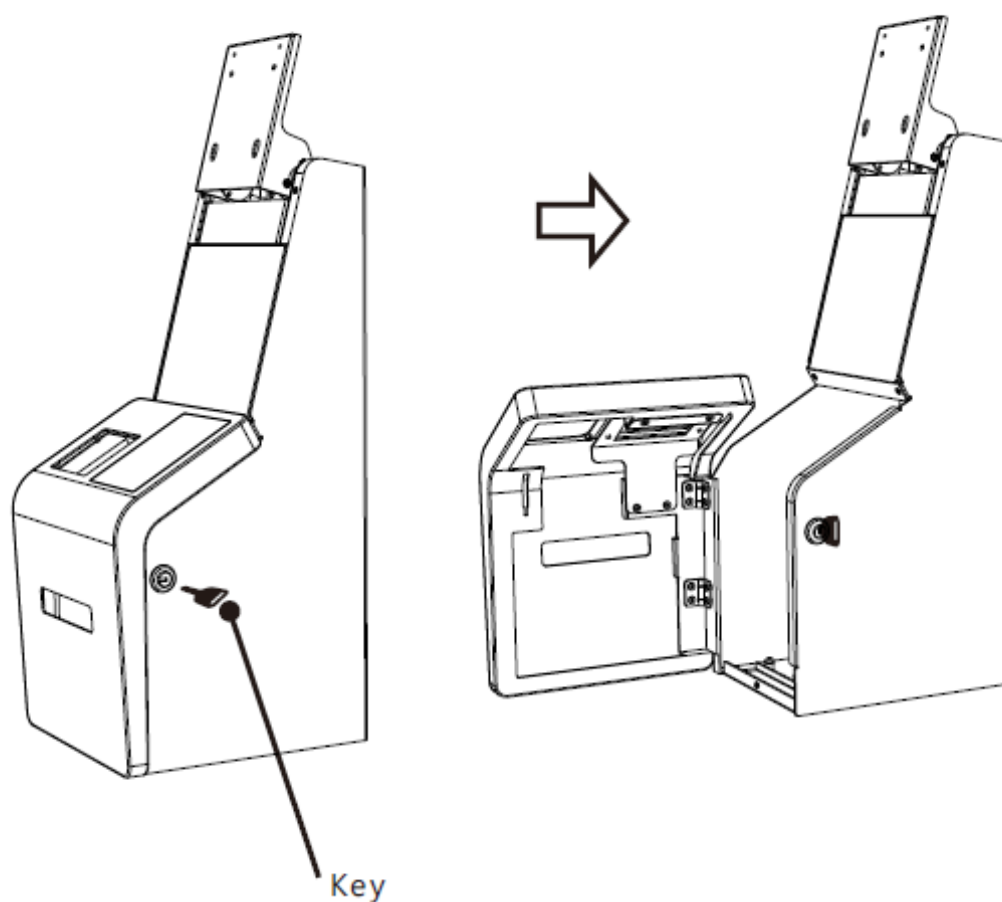

Ticked P/N Item are applicable for above illustration.

- ✓ 910K19PS11700 Counter-top stand
- ✓ 910K19PS11701 Counter-top+Plate
- 910K19PS12700 Floor stand
- 910K19PS12701 Floor Stand+Wheels+Holder

## 2 Remove Printer Base By Removing M3x6 Flat Screw.

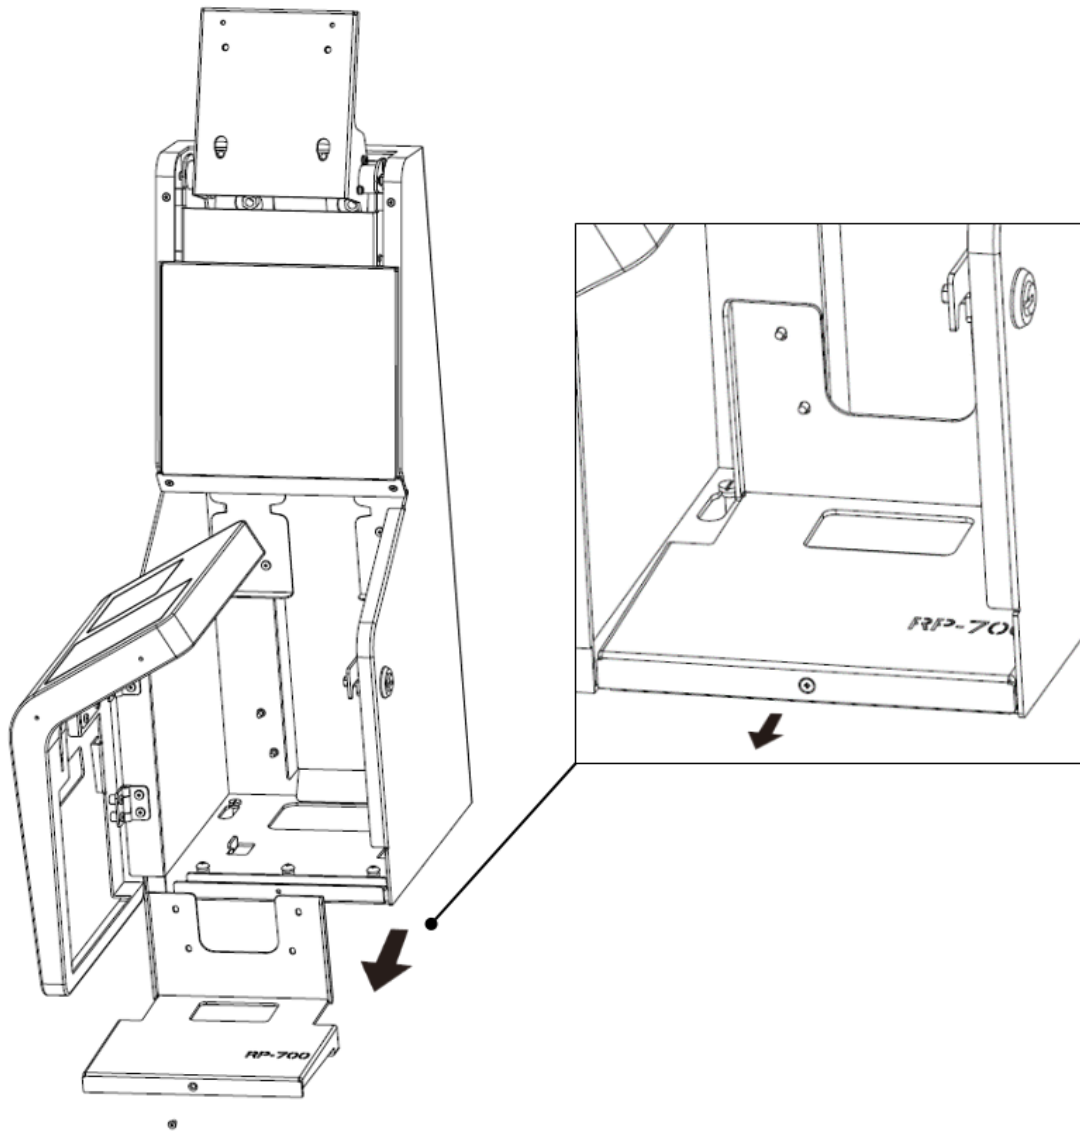

Ticked P/N Item are applicable for above illustration.

- ✓ 910K19PS11700 Counter-top stand
- ✓ 910K19PS11701 Counter-top+Plate
- 910K19PS12700 Floor stand
- 910K19PS12701 Floor Stand+Wheels+Holder



CARE . TRUST . RESPONSIBILITY


Printer Installation, please proceed to following step for corresponding Printer:]

- Step 3: Partner Tech RP-700
- Step 4: Epson TMT-70
- Step 5: Star MC





## 3 ※ Printer Installation Part list: RP-700

Printer: RP-700		
Item	P/T Part Number	Qty
RP-700 Printer Base	N/A	1
RP-700 Linked_bracket	21002500SB004	1
Flat_head_screw_M3x6	2101100030618	1

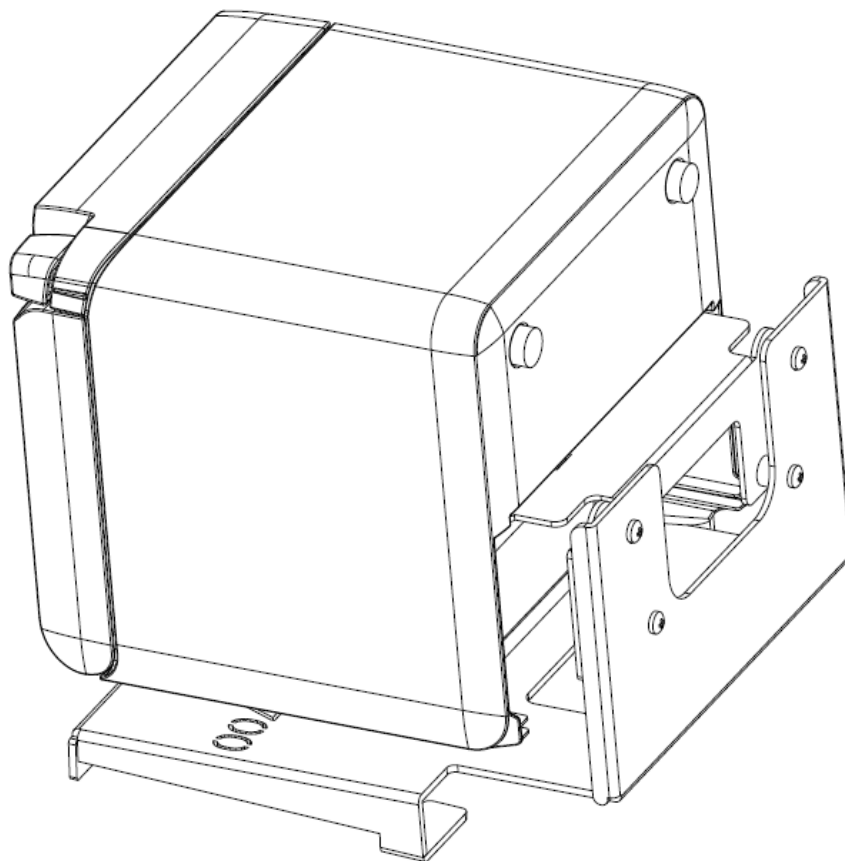


## **3-1** Place **RP-700\_Linked\_Bracket (21002500SB004)** together with **RP-700**

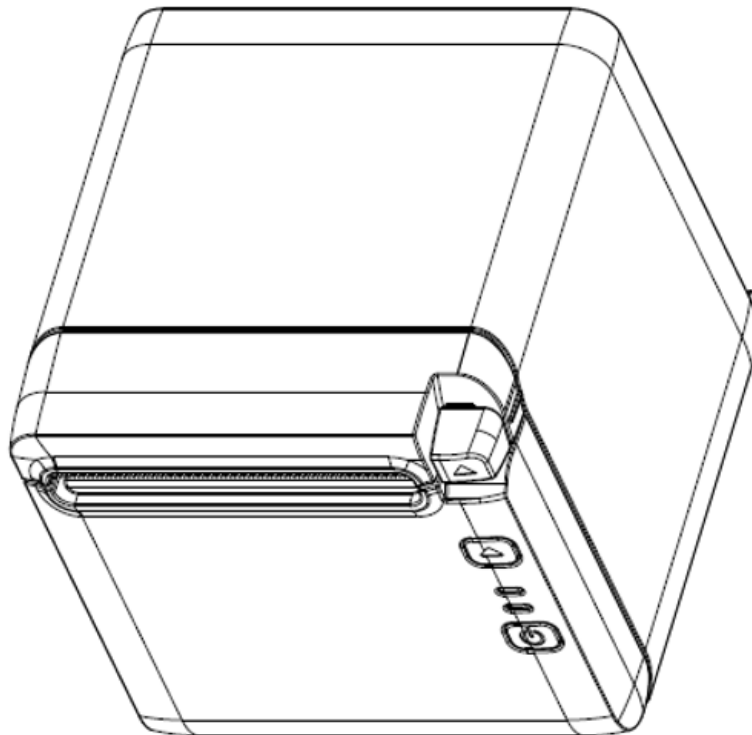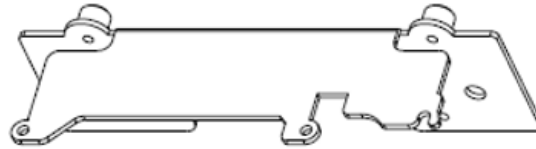

Ticked P/N Item are applicable for above illustration.

- ✓ 910K19PS11700 Counter-top stand
- ✓ 910K19PS11701 Counter-top+Plate
- 910K19PS12700 Floor stand
- 910K19PS12701 Floor Stand+Wheels+Holder


## **3-2** Fasten **RP-700\_Linked\_Bracket** with 3 pcs Screws on **RP-700**.

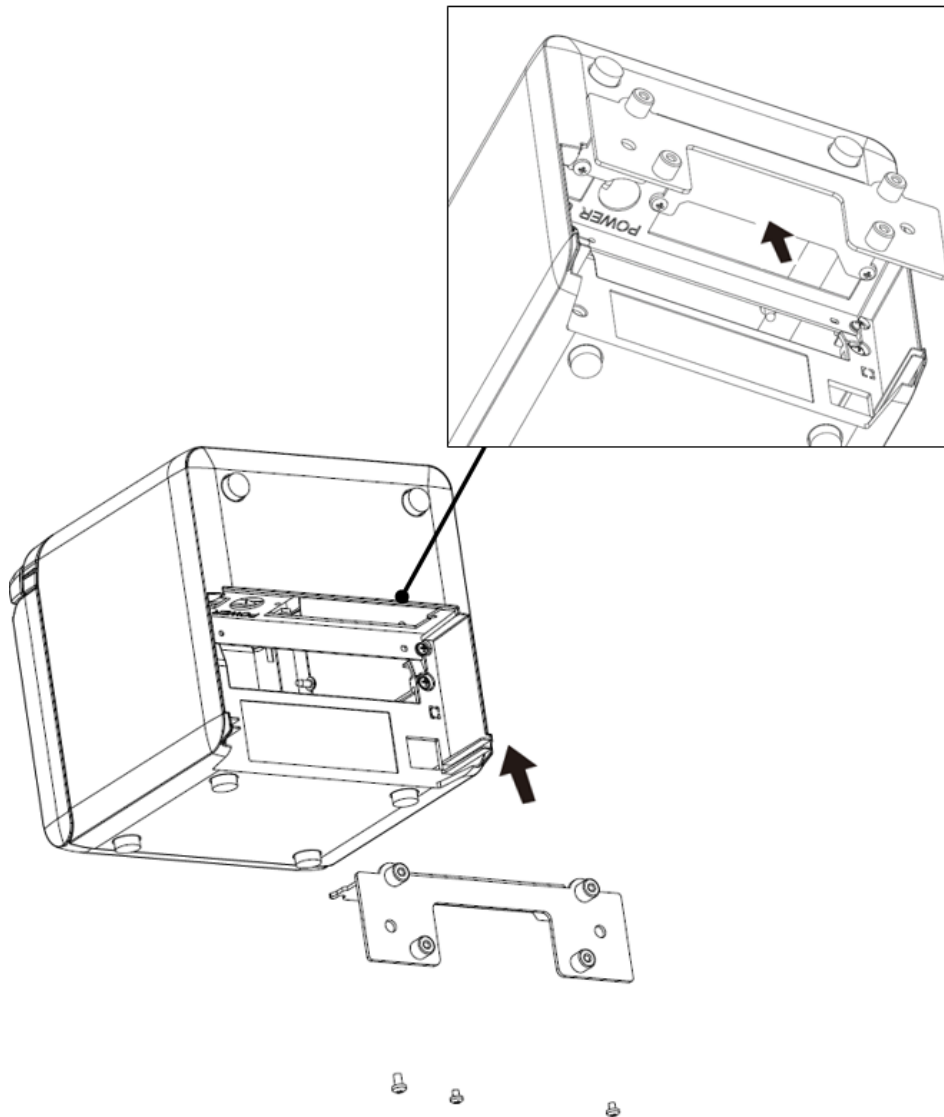

Ticked P/N Item are applicable for above illustration.

- ✓ 910K19PS11700 Counter-top stand
- ✓ 910K19PS11701 Counter-top+Plate
- 910K19PS12700 Floor stand
- 910K19PS12701 Floor Stand+Wheels+Holder

**3-3** Assemble **RP-700\_Linked\_Bracket** and **RP-700\_Linked\_Base** with 4 pcs M3\_Screws..

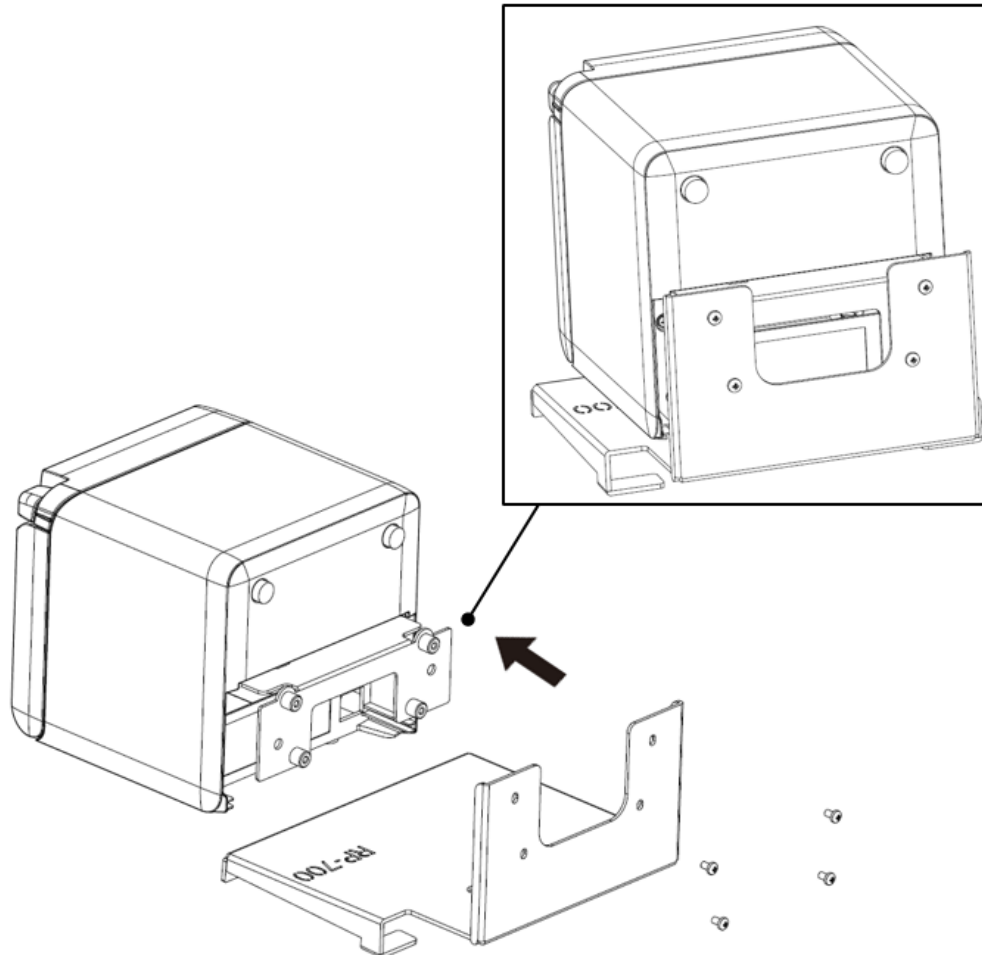


For Counter-top+Plate, Continue to [Step 6](#)

Ticked P/N Item are applicable for above illustration.


- ✓ 910K19PS11700 Counter-top stand
- ✓ 910K19PS11701 Counter-top+Plate
- 910K19PS12700 Floor stand
- 910K19PS12701 Floor Stand+Wheels+Holder

## 4 ※ Printer Installation Part list: Epson TMT-70

Printer: Epson TMT-70		
Item	P/T Part Number	Qty
TMT-70 Printer Base	N/A	1
TMT-70_Linked_bracket	25003500SB006	1
Flat_head_screw_M3x6	2101100030618	1

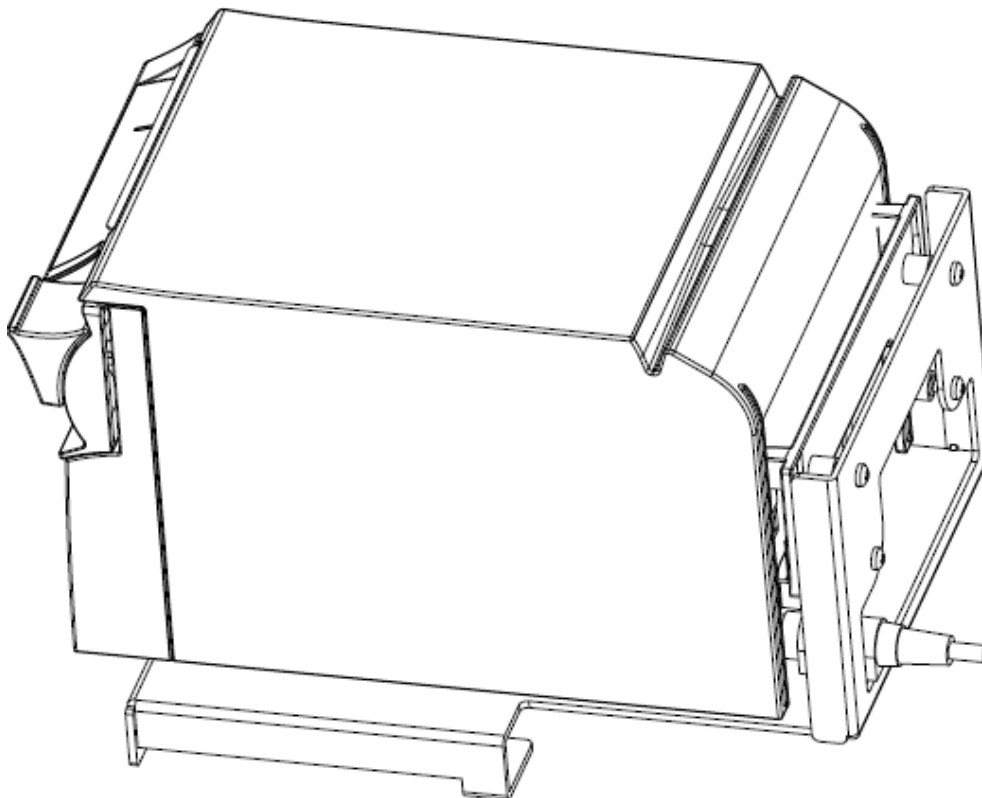


## **4-1** Place **TMT-70\_Linked\_Bracket** together with **TMT-70**

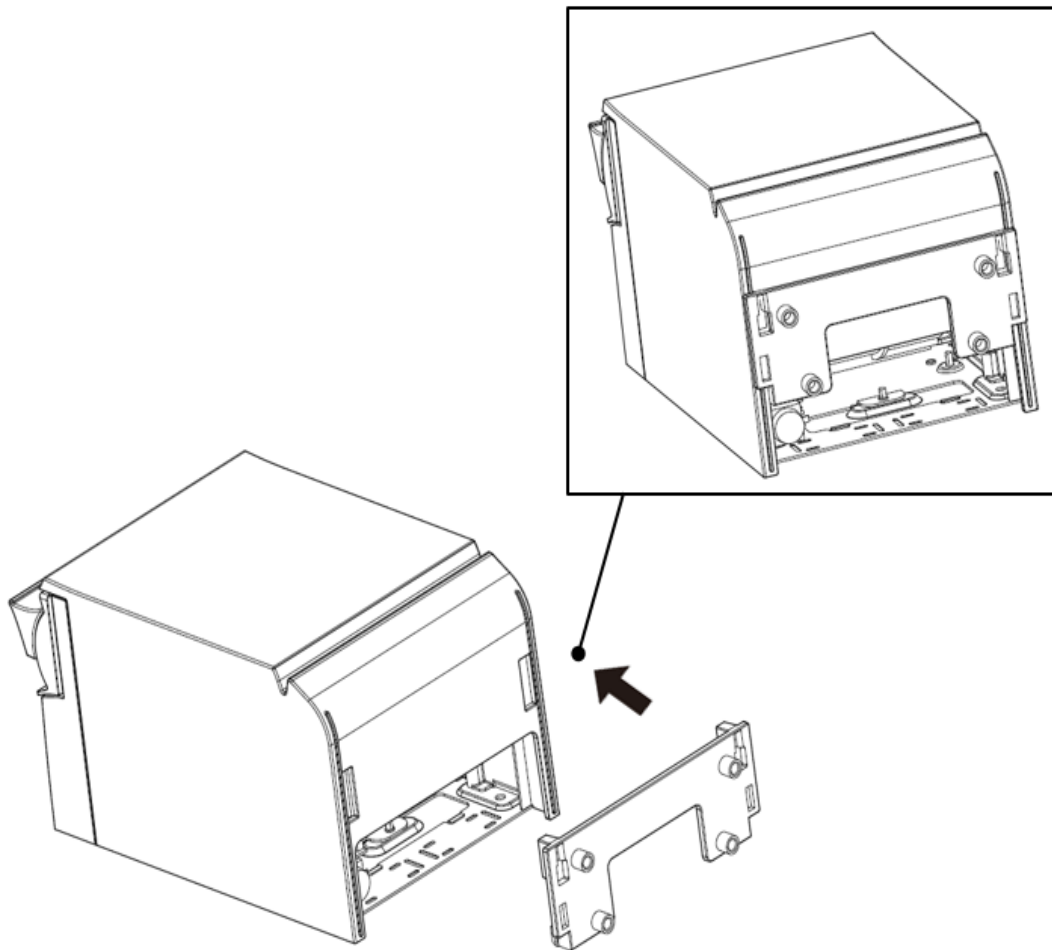

Ticked P/N Item are applicable for above illustration.

- ✓ 910K19PS11700 Counter-top stand
- ✓ 910K19PS11701 Counter-top+Plate
- 910K19PS12700 Floor stand
- 910K19PS12701 Floor Stand+Wheels+Holder

## **4-2** Fasten **TMT-70\_Linked\_Bracket** with 3 pcs Screws with **TMT-70\_printer\_Base**

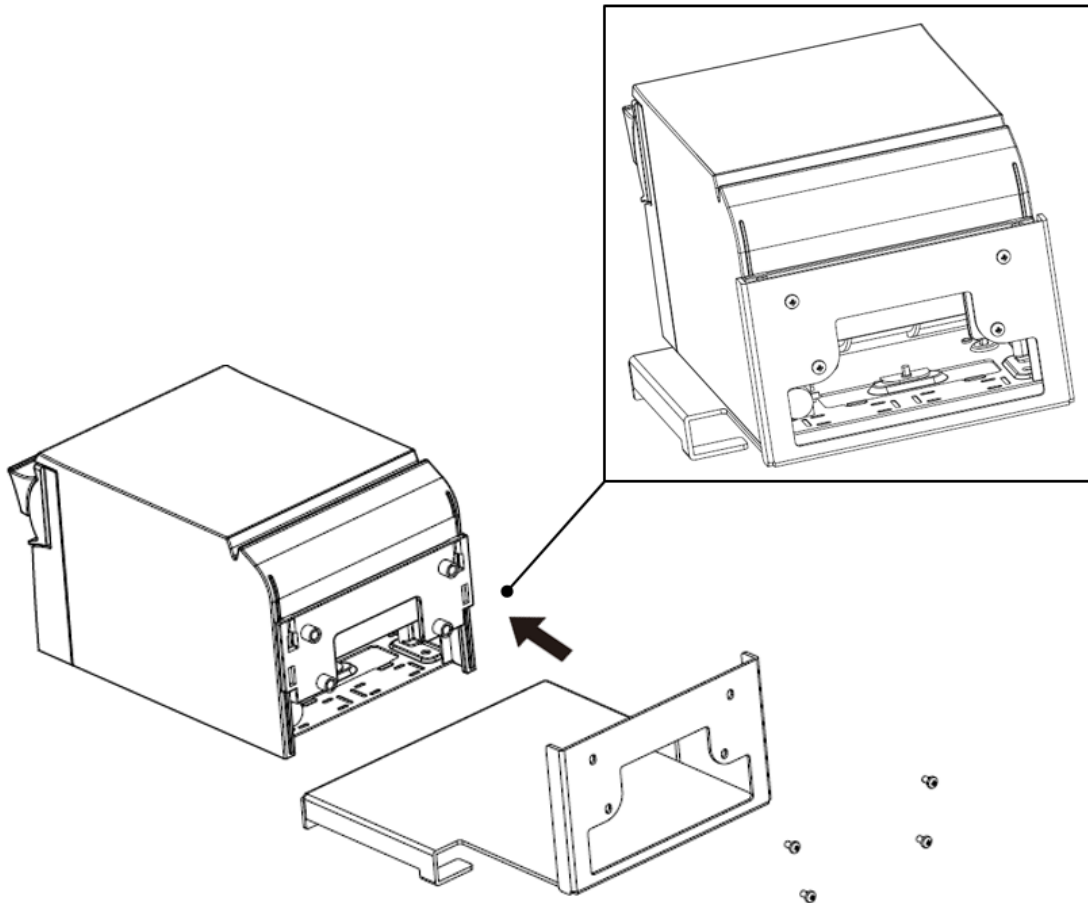


For Counter-top+plate, Continue to [Step 6](#)

Ticked P/N Item are applicable for above illustration.

- ✓ 910K19PS11700 Counter-top stand
- ✓ 910K19PS11701 Counter-top+Plate
- 910K19PS12700 Floor stand
- 910K19PS12701 Floor Stand+Wheels+Holder


## **5 ※ Printer Installation Part list: STAR-MC**

Printer: Star-MC		
Item	P/T Part Number	Qty
Star-MC_Printer Base	21004PS117111	1
TP_2.6x8L_Screw	N/A	2

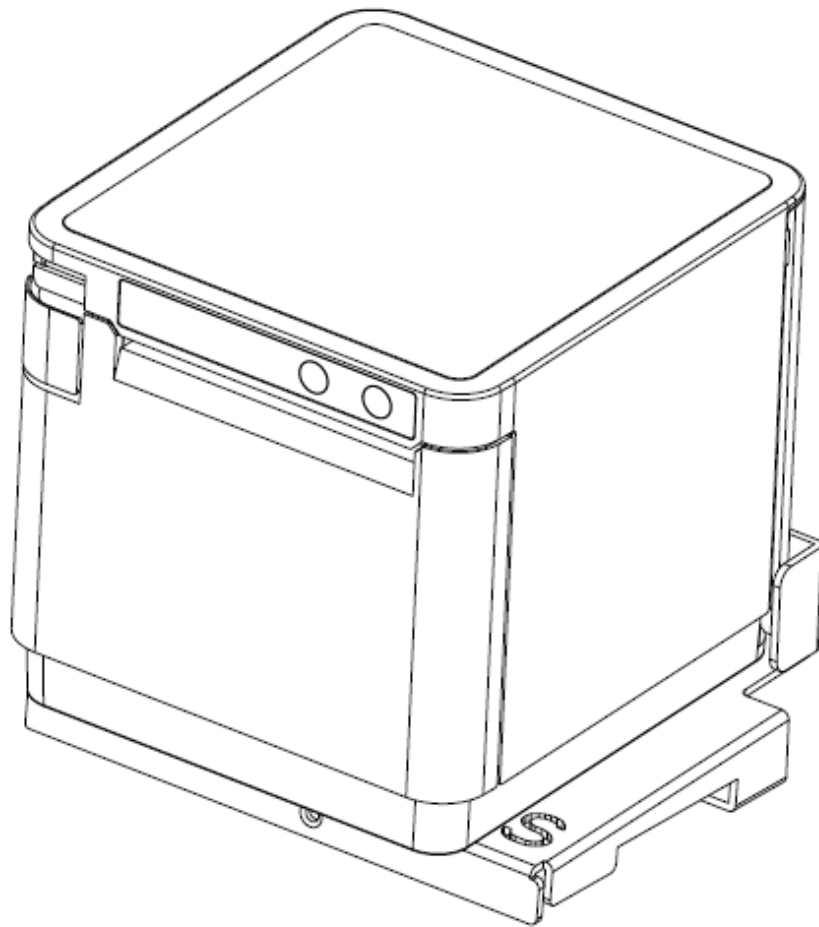



**5** Fasten **STAR\_MC\_Printer\_Base** with 2 pcs TP2.8\_Screws on **STAR\_MC\_Printer**.

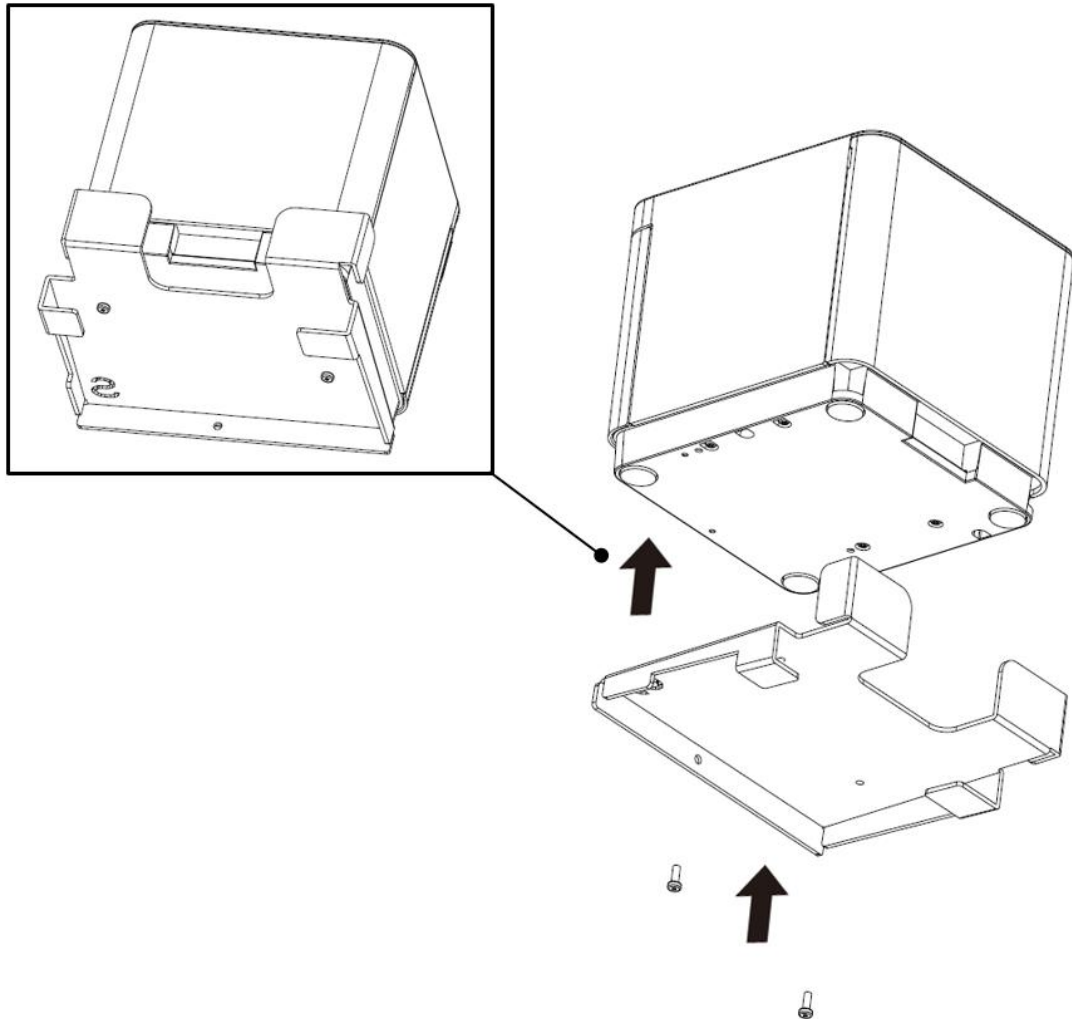


For Counter-top+Plate, Continue to [Step 6](#)

Ticked P/N Item are applicable for above illustration.

- ✓ 910K19PS11700 Counter-top stand
- ✓ 910K19PS11701 Counter-top+Plate
- 910K19PS12700 Floor stand
- 910K19PS12701 Floor Stand+Wheels+Holder


- 6** Align Counter-top\_plate by applying 2 pcs M4\_free-cutting\_screw to attached with the Counter-top Stand.

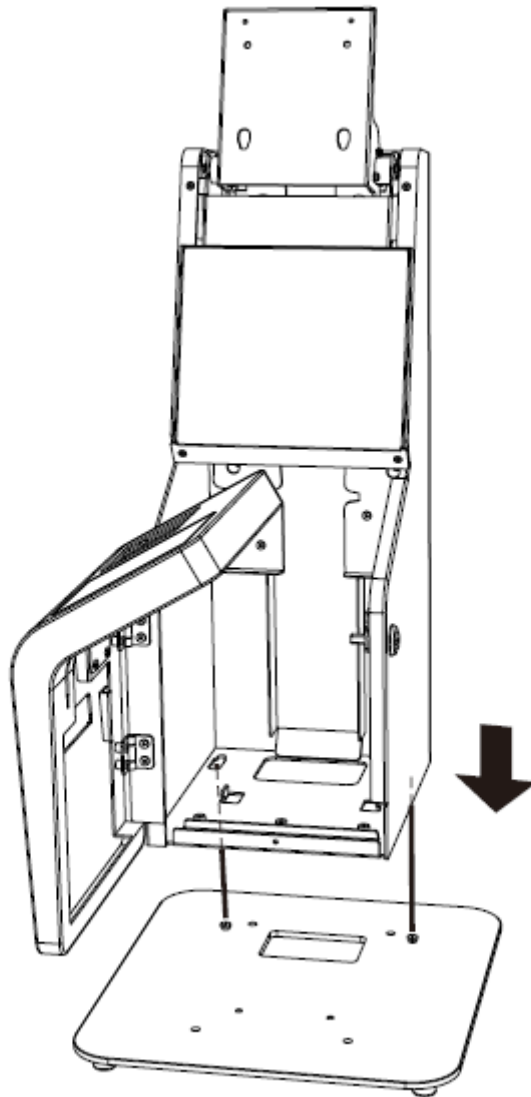

Ticked P/N Item are applicable for above illustration.

- ✓ 910K19PS11700 Counter-top stand
- ✓ 910K19PS11701 Counter-top+Plate
- 910K19PS12700 Floor stand
- 910K19PS12701 Floor Stand+Wheels+Holder


- 7** Once In Position, then Pull Counter-top\_Stand forward to lock in to place.

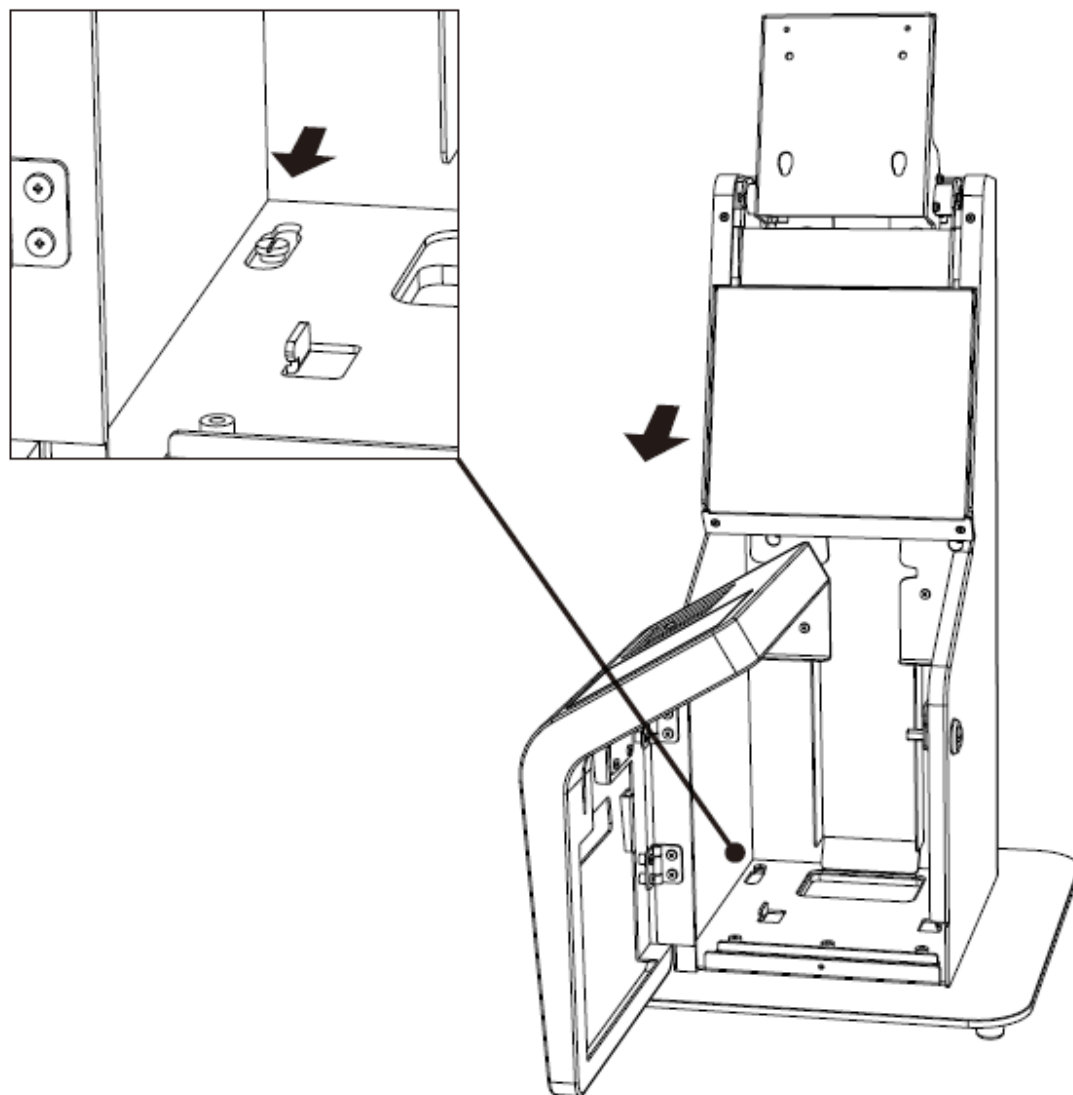

Ticked P/N Item are applicable for above illustration.

- ✓ 910K19PS11700 Counter-top stand
- ✓ 910K19PS11701 Counter-top+Plate
- 910K19PS12700 Floor stand
- 910K19PS12701 Floor Stand+Wheels+Holder


- 8** Fasten 2 pcs of Umbrella\_head\_screw\_M4x8 to lock **Counter-top\_stand** with **Counter-top\_plate**.

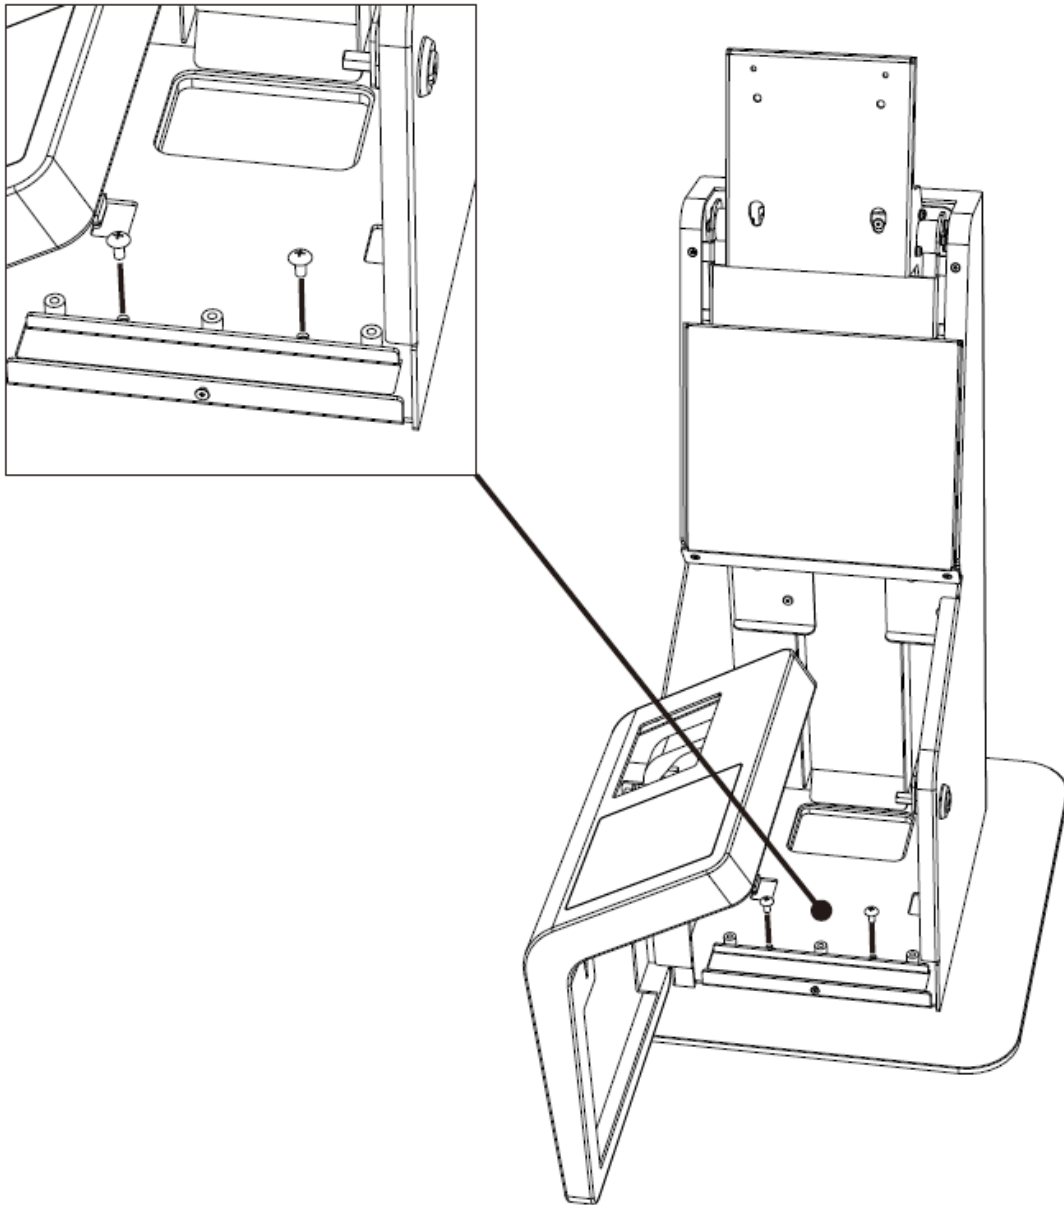

Ticked P/N Item are applicable for above illustration.

- ✓ 910K19PS11700 Counter-top stand
- ✓ 910K19PS11701 Counter-top+Plate
- 910K19PS12700 Floor stand
- 910K19PS12701 Floor Stand+Wheels+Holder

- 9** Place the **installed Printer +Printer\_Base** (depends on Printer Model from **Step 3~5**) Into Counter-top\_Stand and fasten with M3x6 Countersunk Screws.

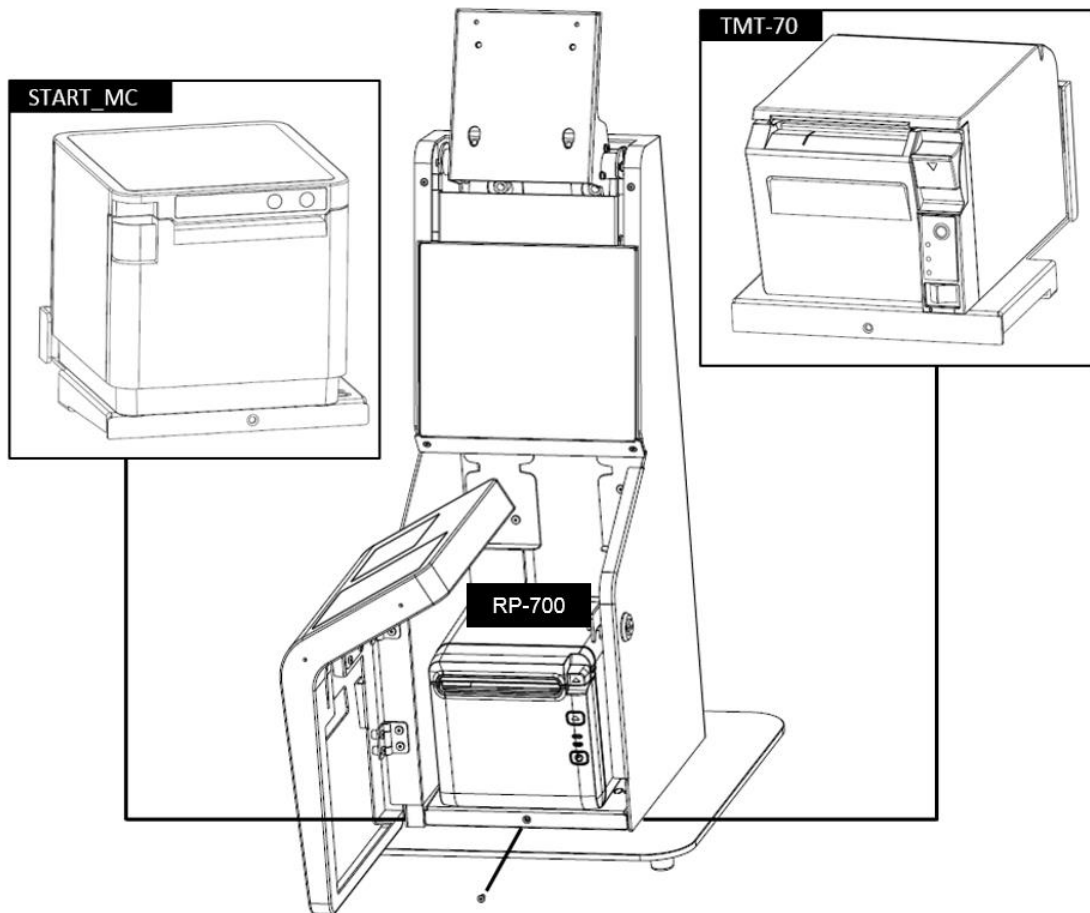

Counter-top\_Stand installation is Complete. Please Proceed to Step 20 for A7 installation or/and Step 13 for Floor-type Application.

Ticked P/N Item are applicable for above illustration.

- ✓ 910K19PS11700 Counter-top stand
- ✓ 910K19PS11701 Counter-top+Plate
- 910K19PS12700 Floor stand
- 910K19PS12701 Floor Stand+Wheels+Holder




CARE . TRUST . RESPONSIBILITY

Scanner Installation, please proceed to following step for corresponding Model:

- Step 11: Honeywell CF-3680
- Step: 12: Newland FM3051


**10** Release 4 pcs M3\_screw on Scanner Bracket that attached on the back of the Printer\_Door.

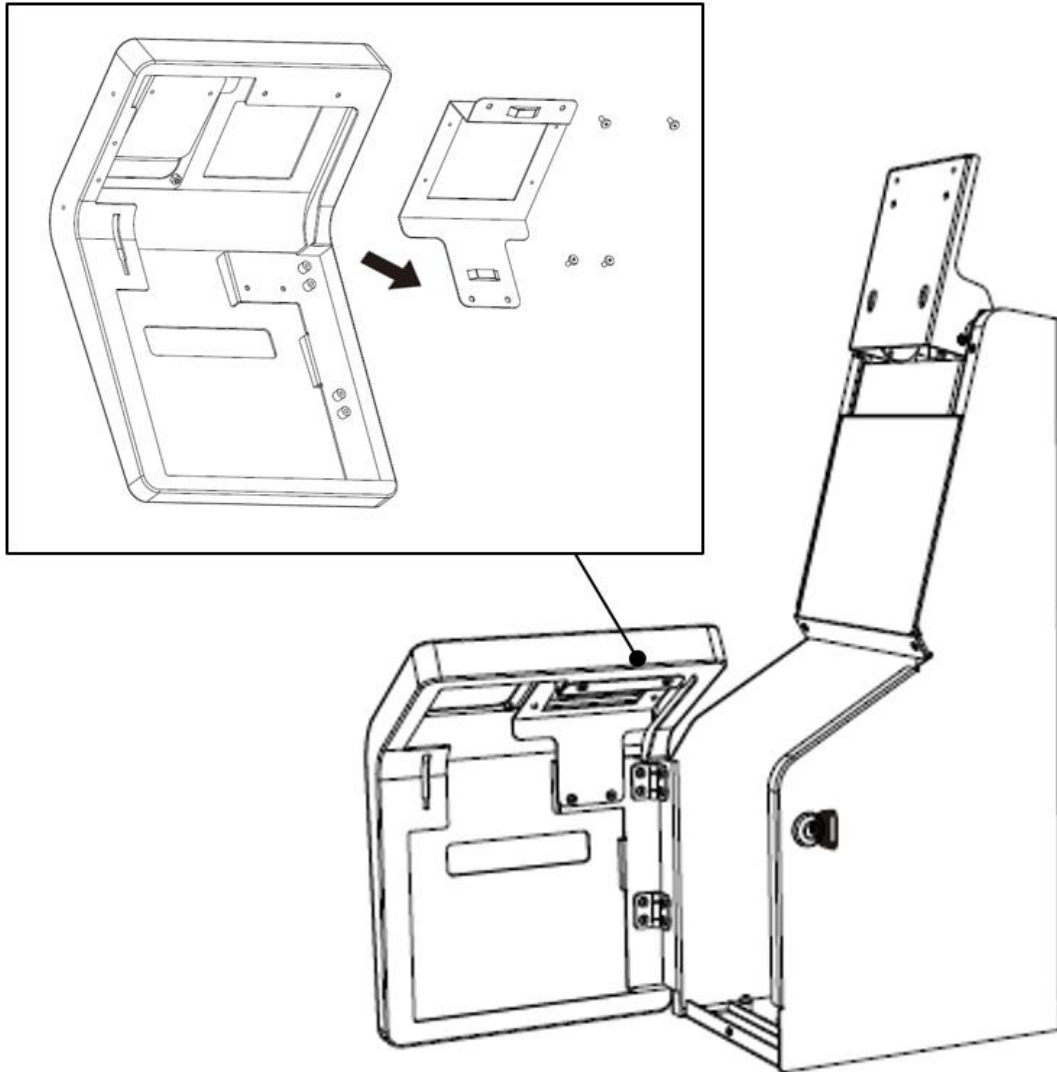

Ticked P/N Item are applicable for above illustration.

- 910K19PS11700 Counter-top stand
- ✓ 910K19PS11701 Counter-top+Plate
- 910K19PS12700 Floor stand
- 910K19PS12701 Floor Stand +Wheels+Holder

- 11** Place **CF-3680 (Scanner)** and Scanner Bracket together, then fasten with 4pcs M3\_screw to lock with the Printer\_Door.(the back)

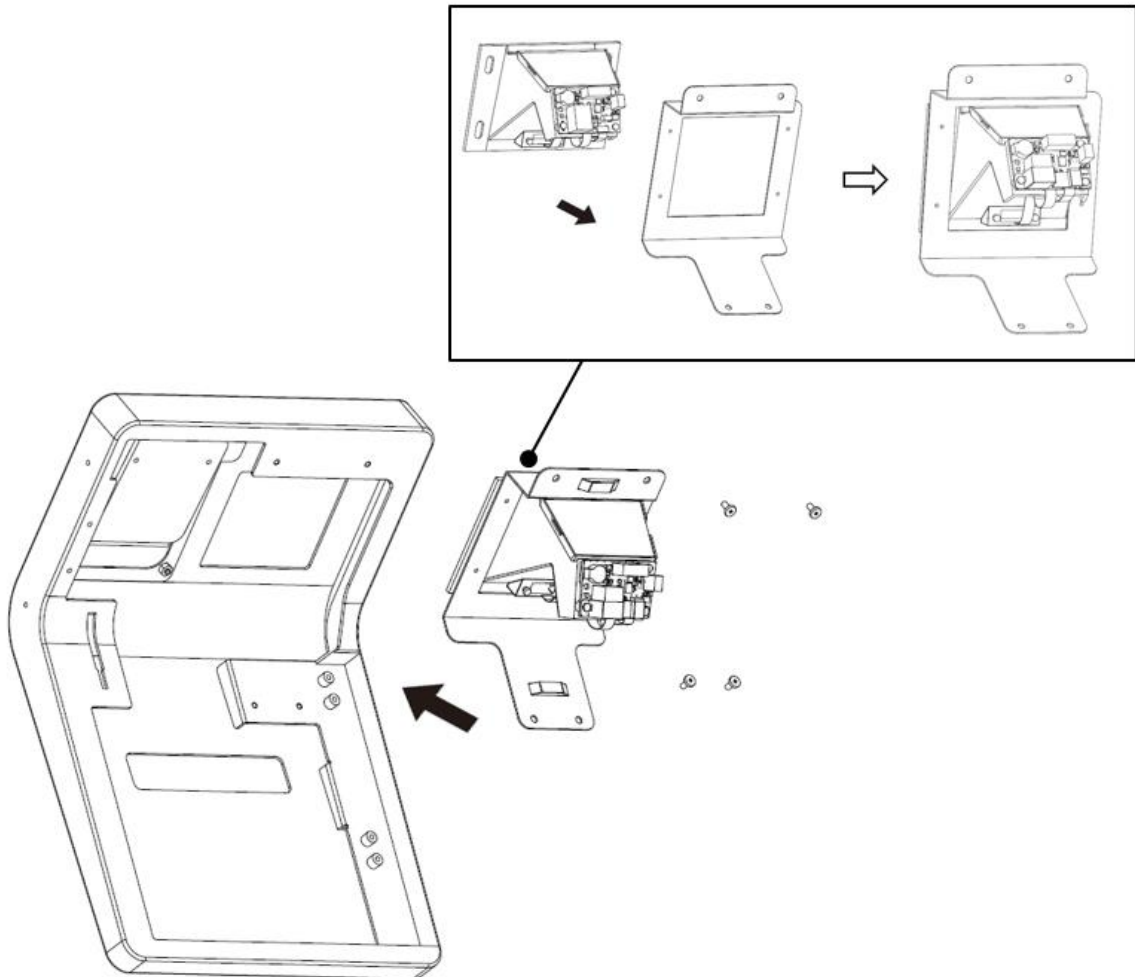


CF-3680 Scanner installation is Complete. Please Proceed to Step 20 for A7 installation or/and Step 13 if for Floor-type Application.

Ticked P/N Item are applicable for above illustration.

- ✓ 910K19PS11700 Counter-top stand
- ✓ 910K19PS11701 Counter-top+Plate
- 910K19PS12700 Floor stand
- 910K19PS12701 Floor Stand+Wheels+Holder



**12** Place **Newland FM3051 (Scanner)** and Scanner Bracket together, then fasten with 4pcs M3\_screw to lock with the Printer\_Door.(the back)

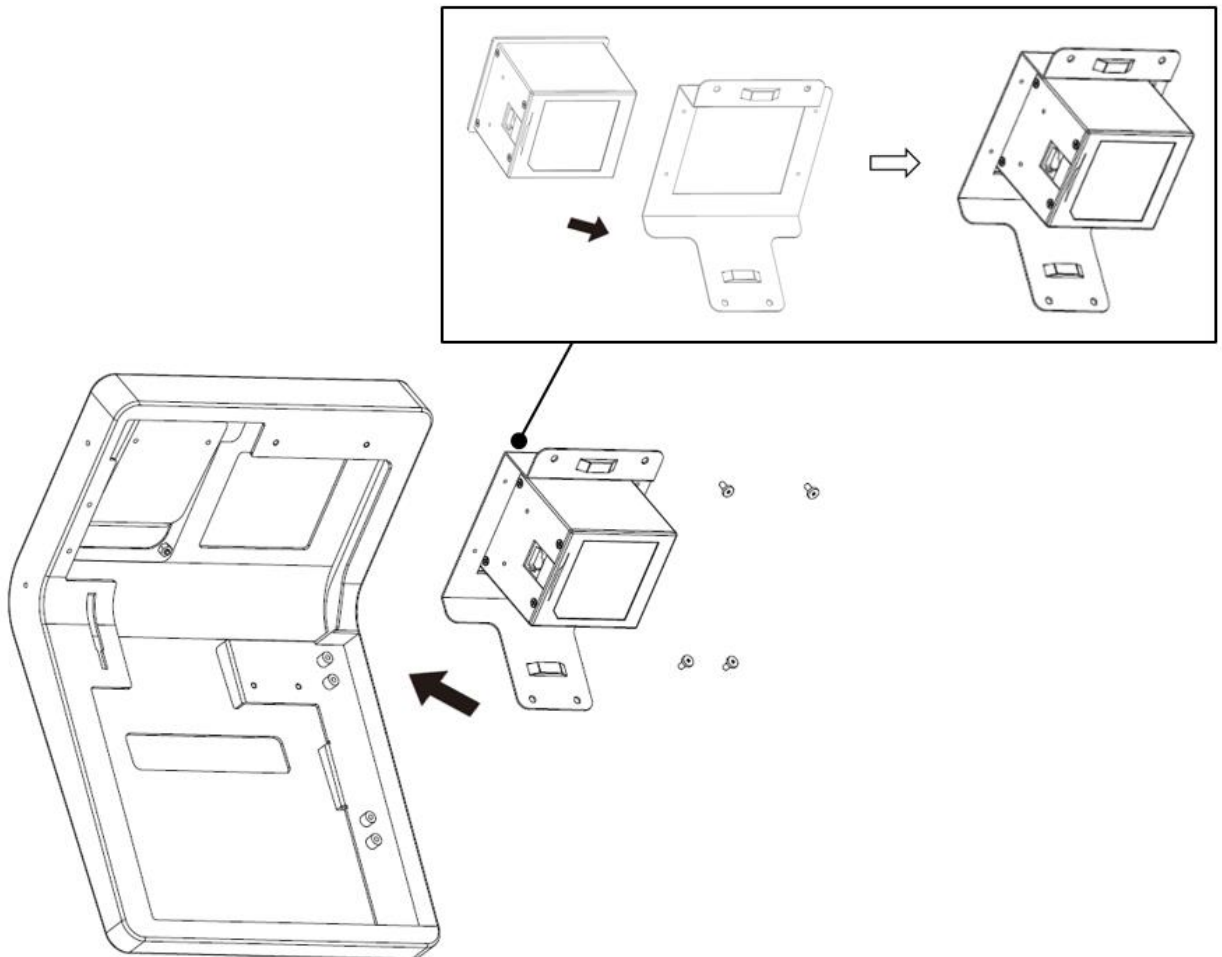


Newland FM3051 Scanner installation is Complete. Please Proceed to Step 20 for A7 installation or/and Step 13 if for Floor-type Application.

Ticked P/N Item are applicable for above illustration.

- ✓ 910K19PS11700 Counter-top stand
- ✓ 910K19PS11701 Counter-top+Plate
- 910K19PS12700 Floor stand
- 910K19PS12701 Floor Stand+Wheels+Holder


- 13** Align The Floor Base with Floor\_stand. Be Aware of The Floor Base Facing when Installation.

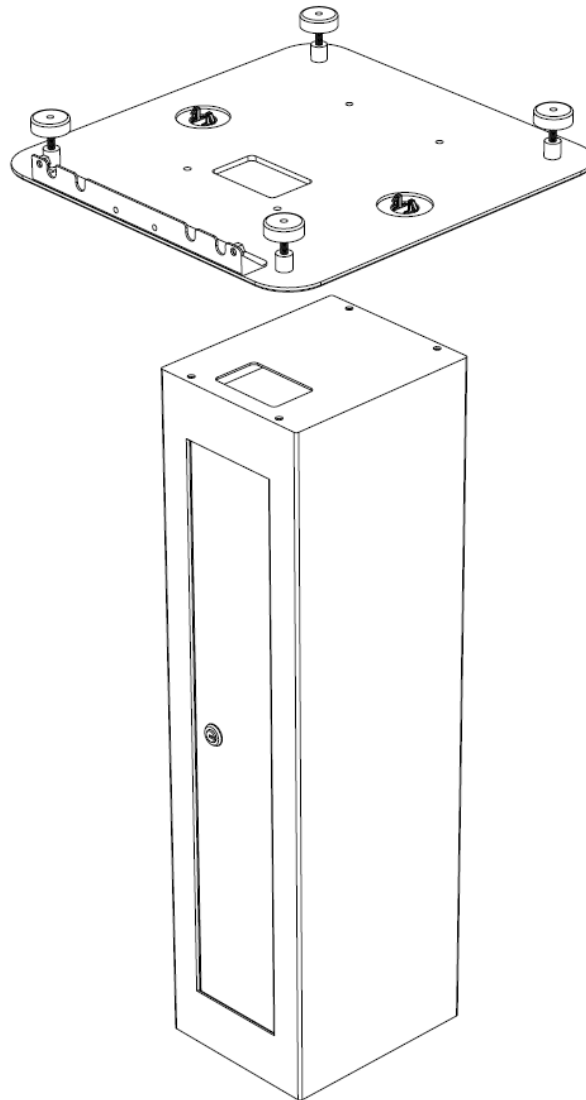

Ticked P/N Item are applicable for above illustration.

- |                 |                            |
|-----------------|----------------------------|
| 910K19PS11700   | Counter-top stand          |
| 910K19PS11701   | Counter-top+Plate          |
| ✓ 910K19PS12700 | Floor stand                |
| ✓ 910K19PS12701 | Floor Stand +Wheels+Holder |


## **14** Applying 4pcs of M6x15L Screw to lock the Base Plate with The Stand.

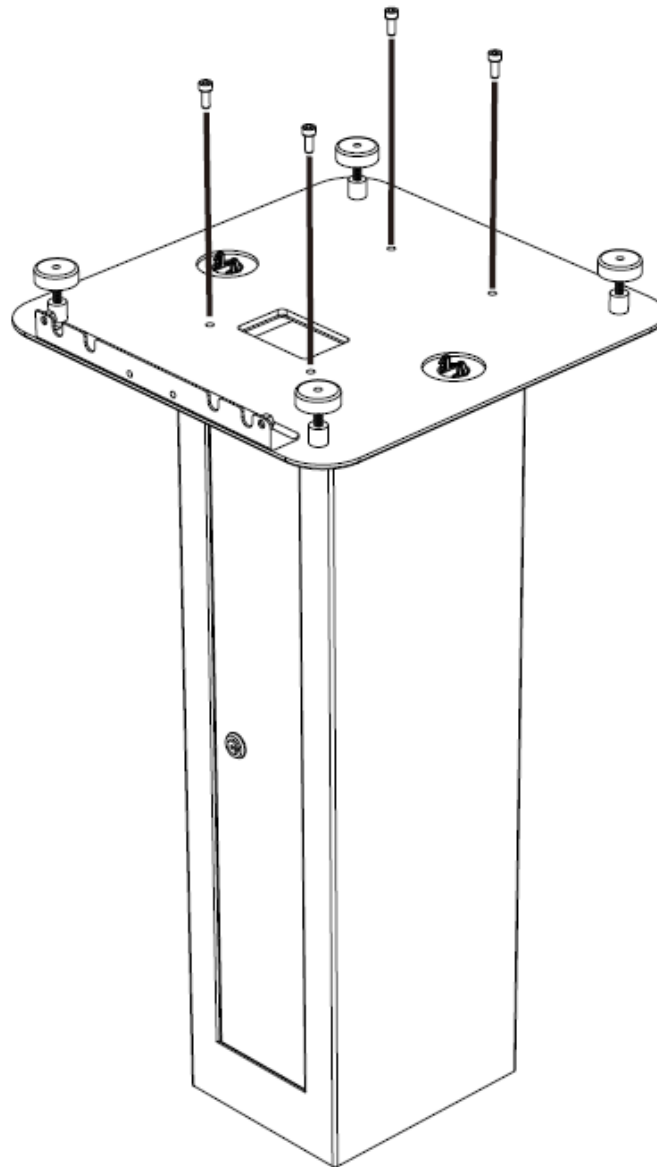

Ticked P/N Item are applicable for above illustration.

- |                 |                            |
|-----------------|----------------------------|
| 910K19PS11700   | Counter-top stand          |
| 910K19PS11701   | Counter-top+Plate          |
| ✓ 910K19PS12700 | Floor stand                |
| ✓ 910K19PS12701 | Floor Stand +Wheels+Holder |


## 15 Align Floor\_stand by Applying M4\_free\_cut\_screw to attached with Counter-top\_stand (**Without** Counter\_Top\_Plate)

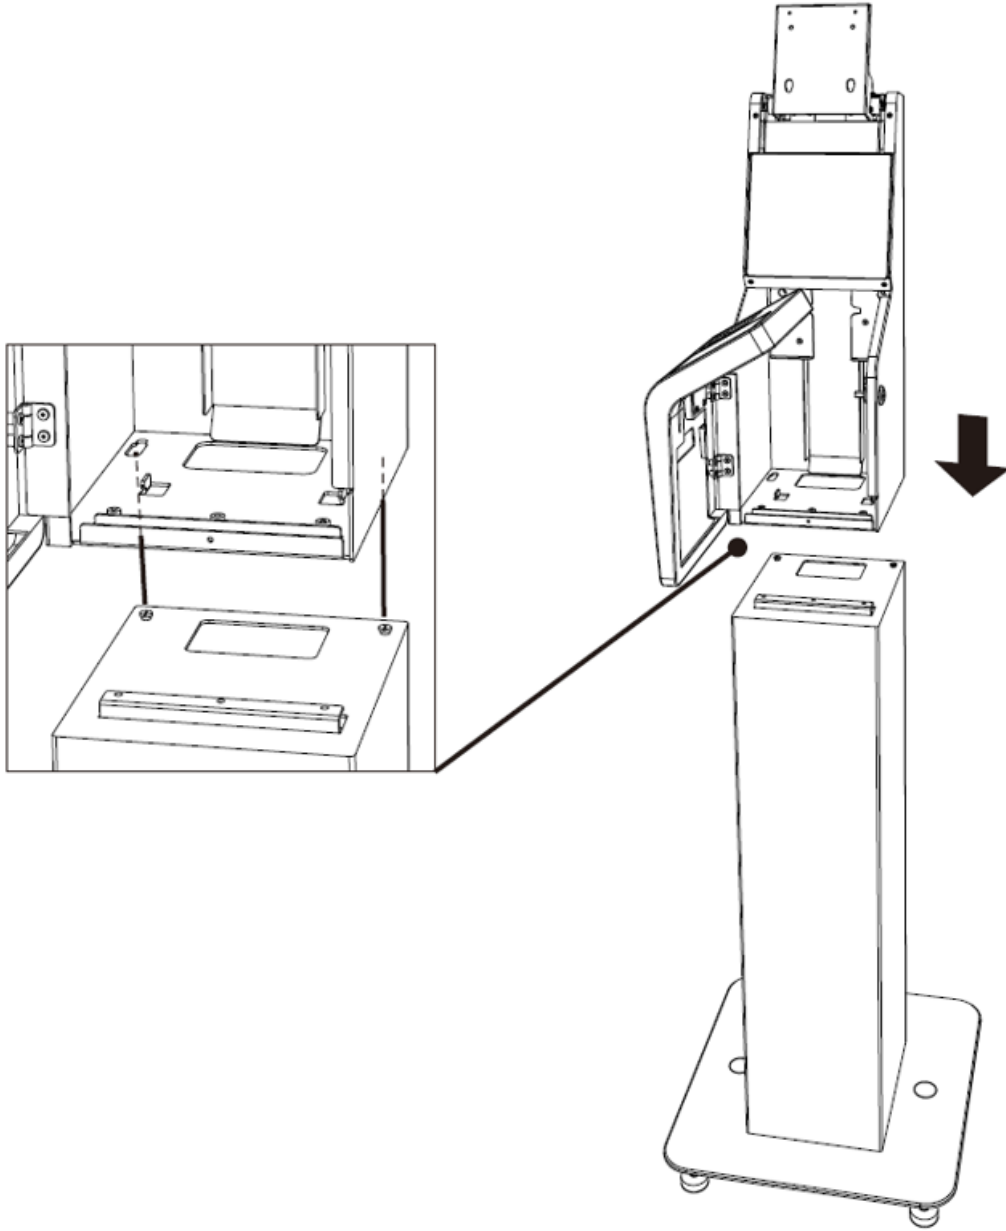

Ticked P/N Item are applicable for above illustration.

- ✓ 910K19PS11700 Counter-top stand
- 910K19PS11701 Counter-top+Plate
- ✓ 910K19PS12700 Floor stand
- ✓ 910K19PS12701 Floor Stand+Wheels+Holder


**16** Once in Position, then Pull Counter-top\_Stand forward to lock in to place.

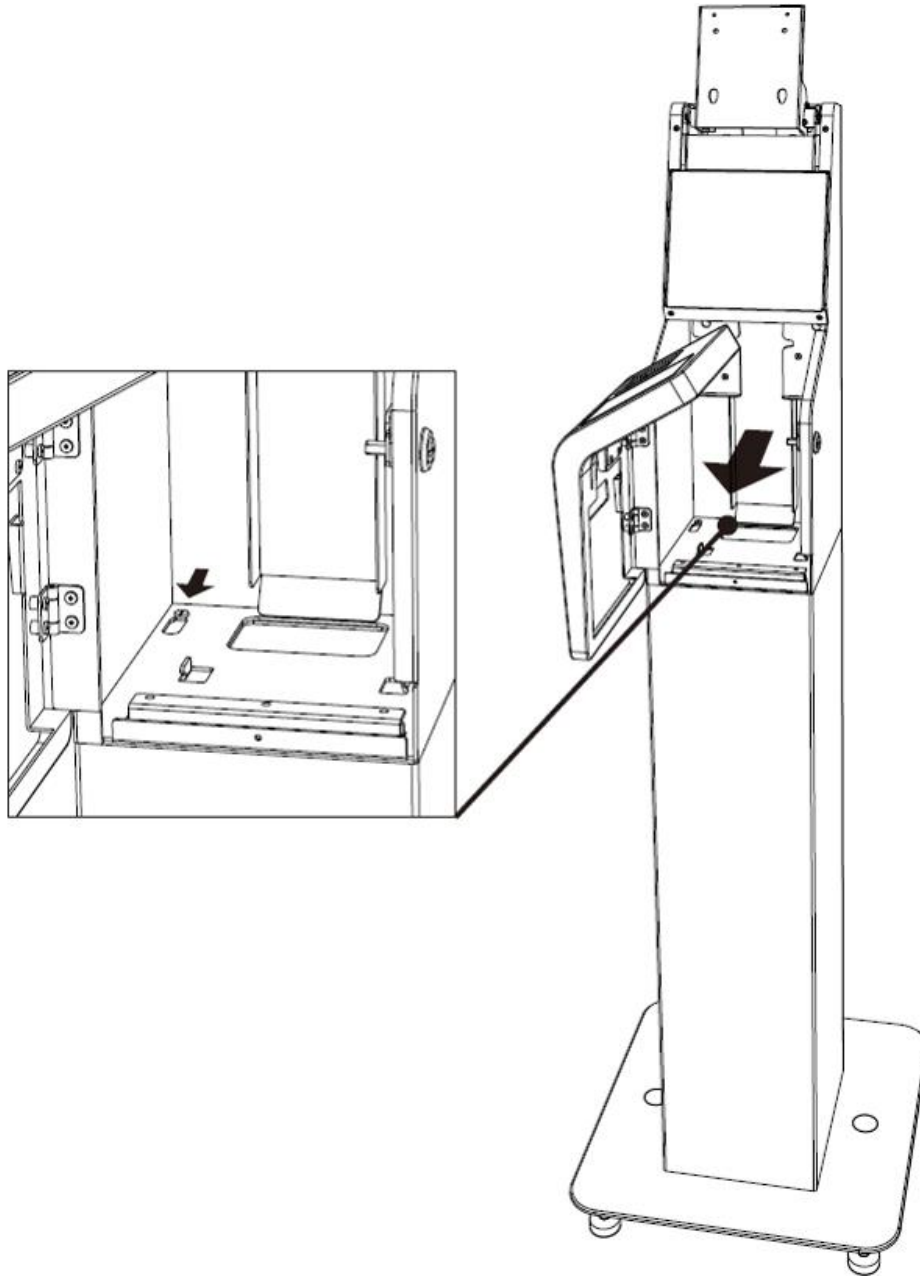

Ticked P/N Item are applicable for above illustration.

- ✓ 910K19PS11700 Counter-top stand
- 910K19PS11701 Counter-top+Plate
- ✓ 910K19PS12700 Floor stand
- ✓ 910K19PS12701 Floor Stand+Wheels+Holder


- 17** Align the Holder against Holder holes position at the rear-end of Counter-top stand. Applying 2 pcs M5x7\_Screw to Lock the Holder.

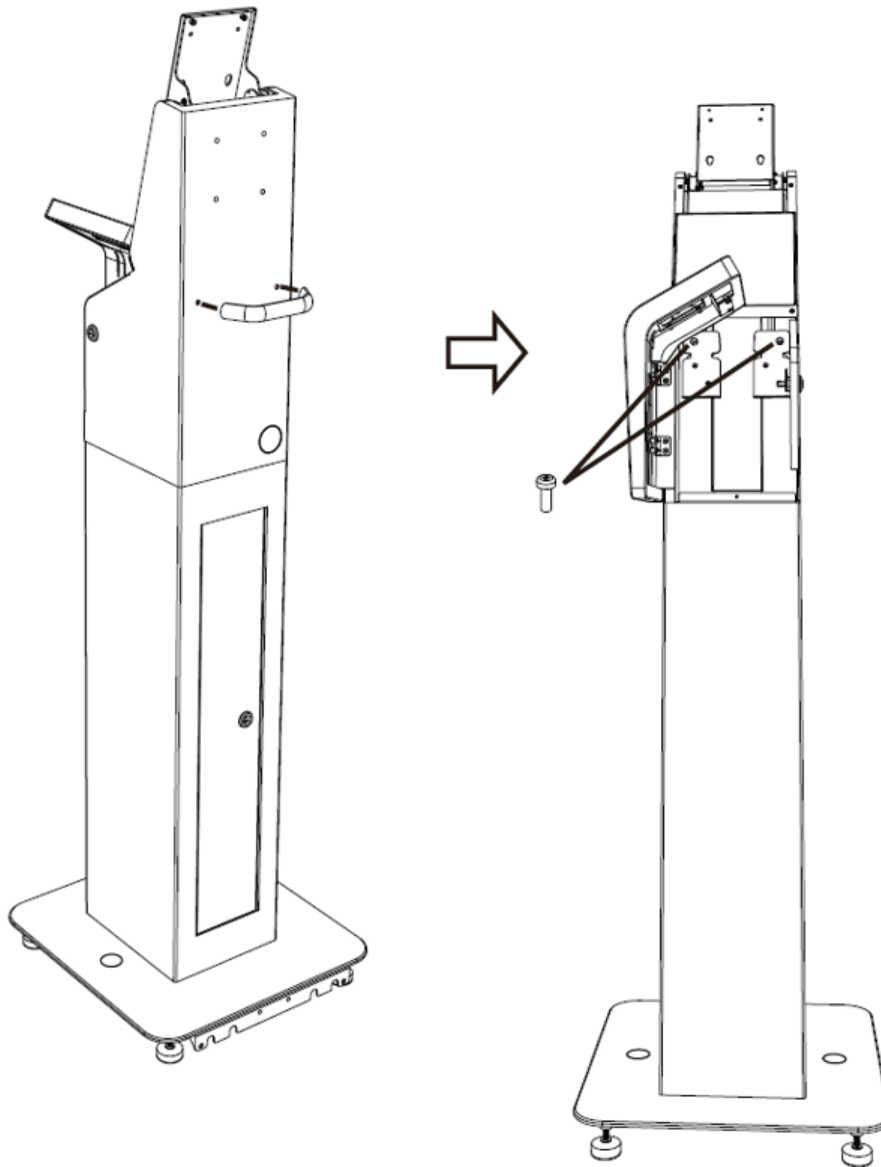

Ticked P/N Item are applicable for above illustration.

- |                 |                           |
|-----------------|---------------------------|
| 910K19PS11700   | Counter-top stand         |
| 910K19PS11701   | Counter-top+Plate         |
| 910K19PS12700   | Floor stand               |
| ✓ 910K19PS12701 | Floor Stand+Wheels+Holder |


- 18** Align Wheel Kit against bottom of Floor\_Base, and Lock with 4 pcs M6x15\_Screw.

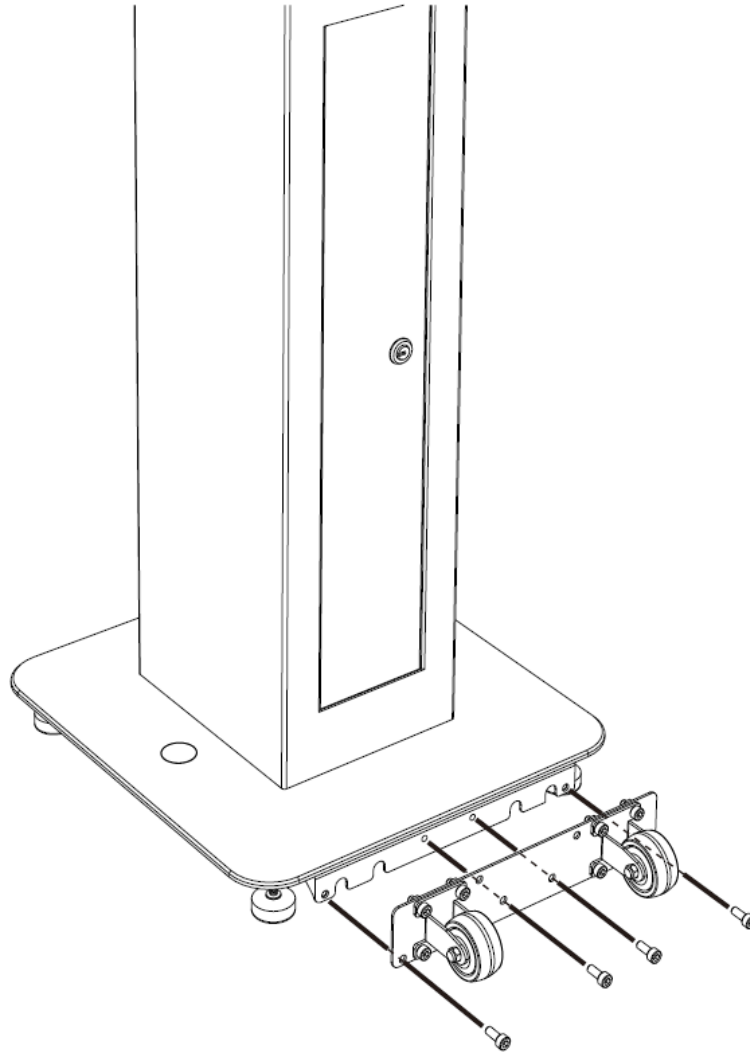

Ticked P/N Item are applicable for above illustration.

- |                 |                           |
|-----------------|---------------------------|
| 910K19PS11700   | Counter-top stand         |
| 910K19PS11701   | Counter-top+Plate         |
| 910K19PS12700   | Floor stand               |
| ✓ 910K19PS12701 | Floor Stand+Wheels+Holder |

- 19** Place the Printer Base (with or without Printer) and Fasten with M3x6\_flat\_screw. Lock the Printer Door with the Key.

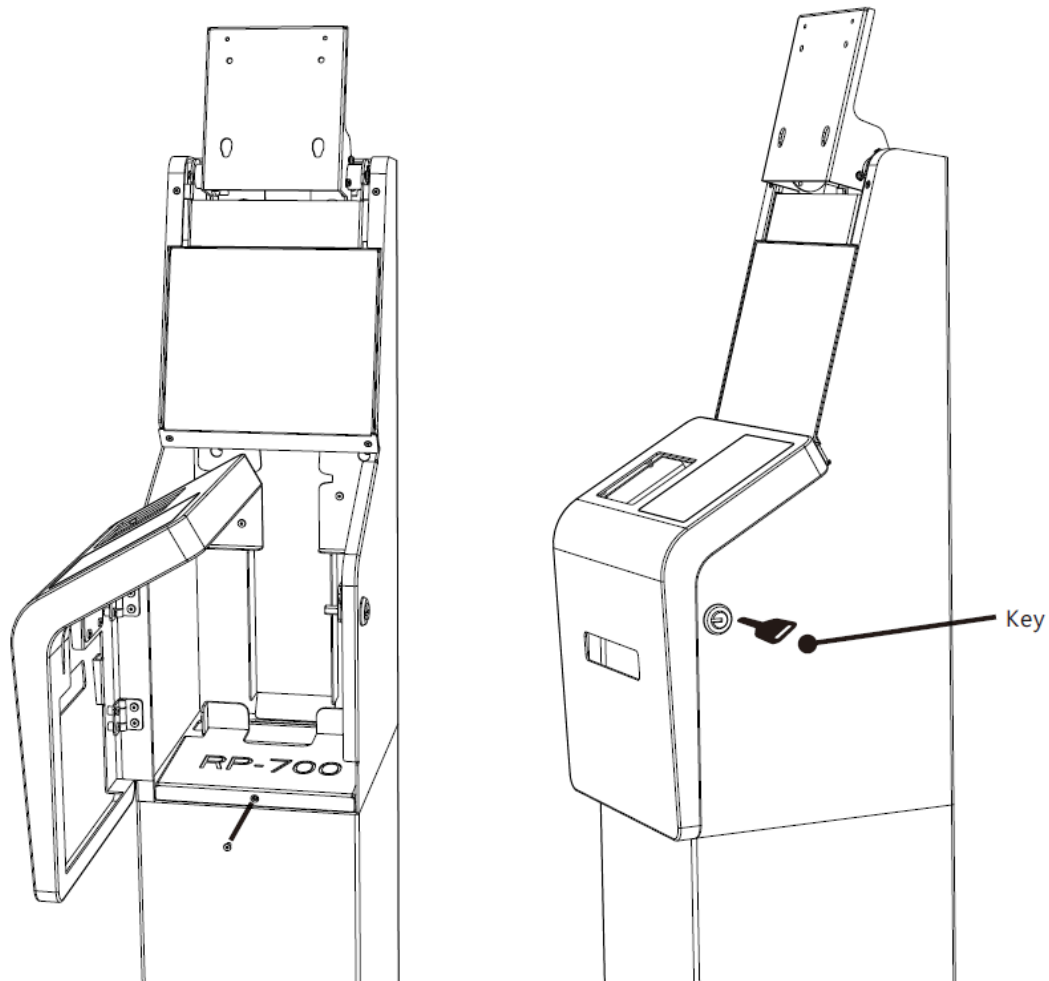


Floor\_Stand installation is Complete. Please Proceed to Step 20 for A7 installation.

Ticked P/N Item are applicable for above illustration.

- ✓ 910K19PS11700 Counter-top stand
- 910K19PS11701 Counter-top+Plate
- ✓ 910K19PS12700 Floor stand
- ✓ 910K19PS12701 Floor Stand+Wheels+Holder




- 20** Apply 2 pcs M4\_free-cutting\_screw on A7, then mounting A7 with Counter-top\_stand by 2 pcs Umbrella\_head\_screw\_M4x8 through VESA holes.  
(Applicable for Both Counter-top and Floor-type Application.)

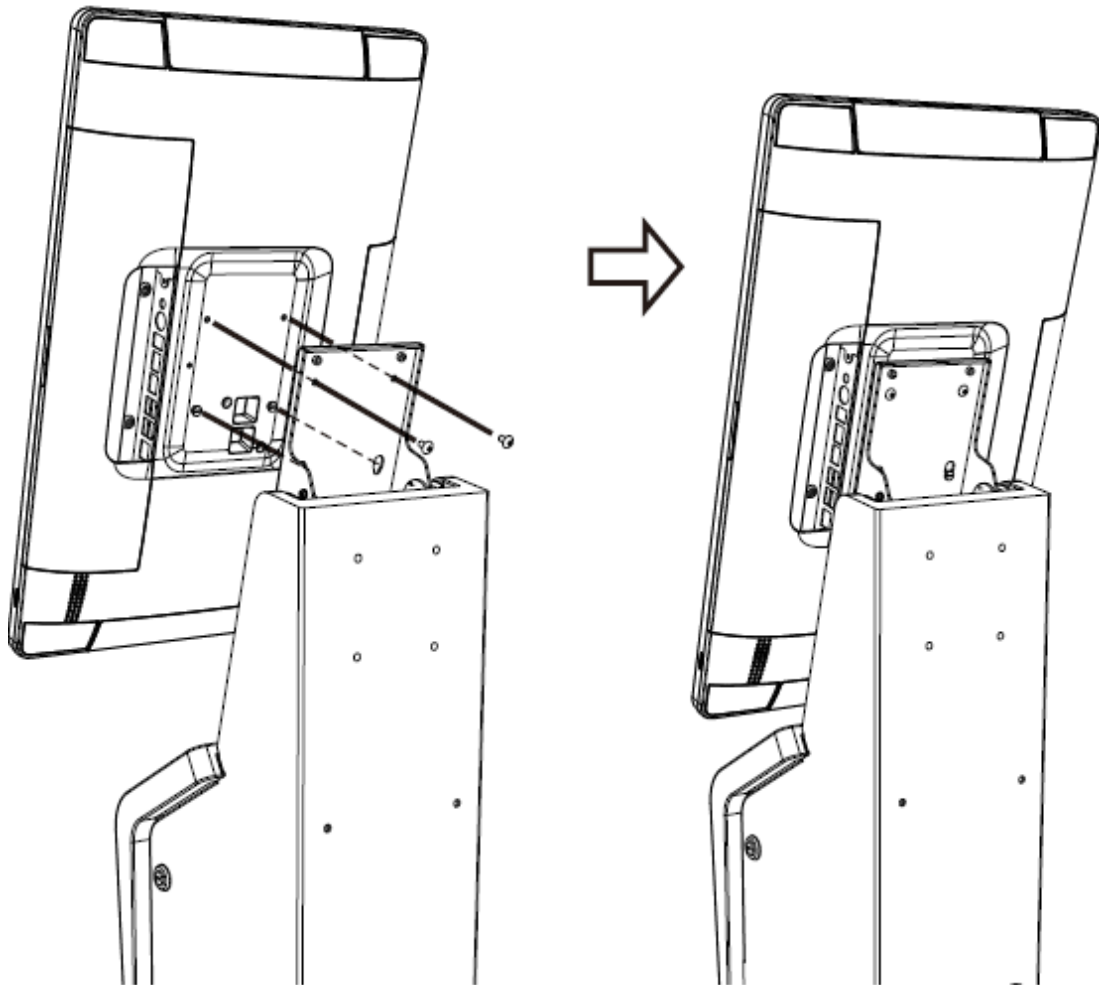

Ticked P/N Item are applicable for above illustration.

- ✓ 910K19PS11700 Counter-top stand
- ✓ 910K19PS11701 Counter-top+Plate
- ✓ 910K19PS12700 Floor stand
- ✓ 910K19PS12701 Floor Stand+Wheels+Holder


- 21** Slide-in Rear cover from the top. Apply 2 pcs M3x4L\_Screw to Lock Rear Cover.  
(Applicable for both Counter-top and Floor-type application.)

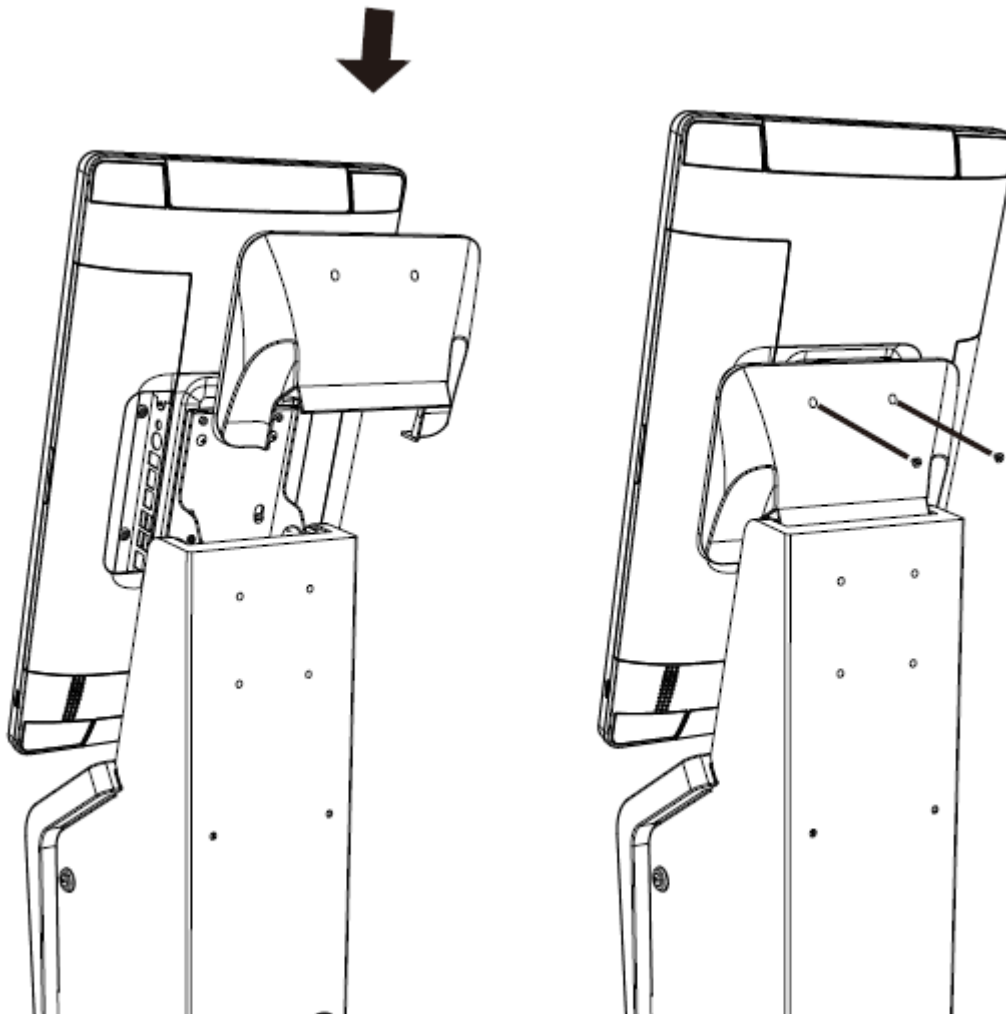

Ticked P/N Item are applicable for above illustration.

- ✓ 910K19PS11700 Counter-top stand
- ✓ 910K19PS11701 Counter-top+Plate
- ✓ 910K19PS12700 Floor stand
- ✓ 910K19PS12701 Floor Stand+Wheels+Holder

## **B. AD-215F Attached Payment Bracket**

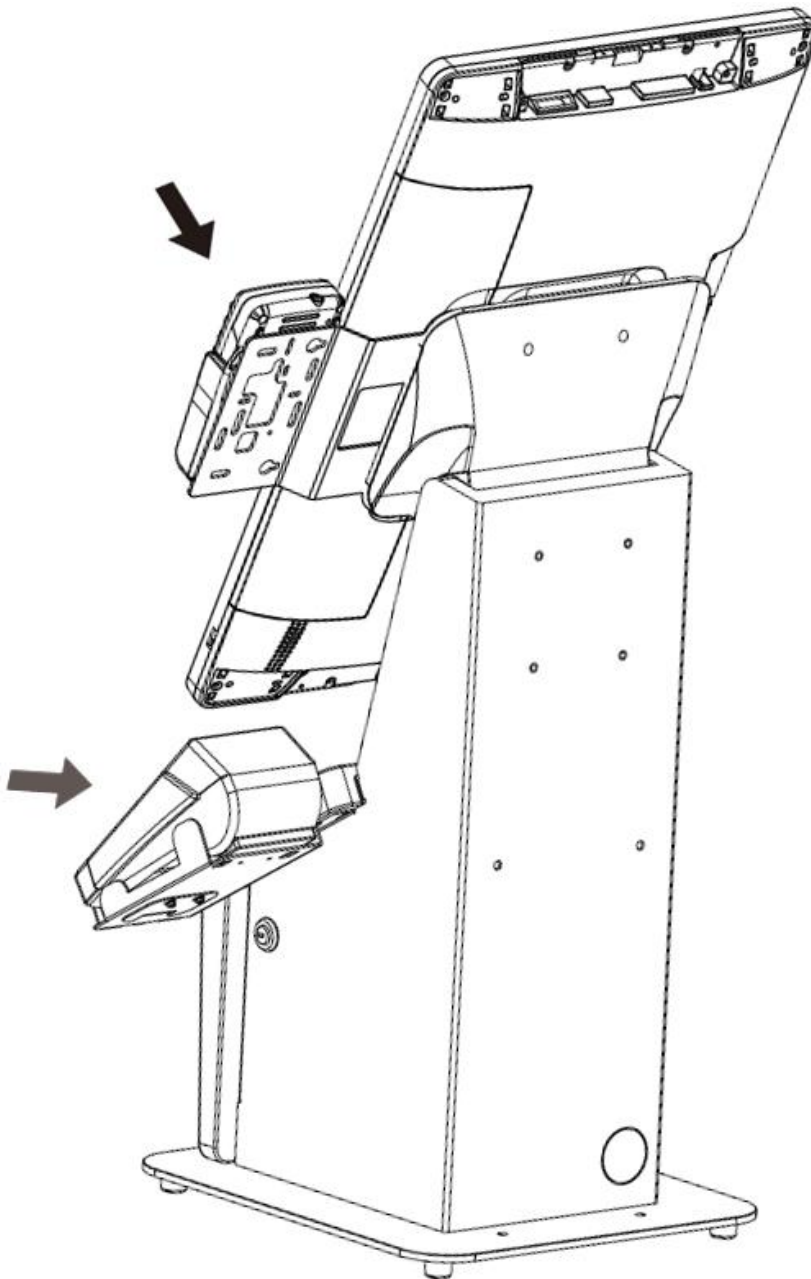




CARE . TRUST . RESPONSIBILITY

Payment Bracket Installation, please proceed to following step for corresponding Payment Terminal:


- Step 1: attached with A7. Verifone\_VX-805A / Ingenico iUC285 Ingenico iPP320 / IDTECH AUGUSTA
- Step 2: attached at Printed Door. Verifone\_VX-805A / Ingenico iUC285 Ingenico iPP320 / IDTECH AUGUSTA
- Step 3: attached at Printed Door. Verifone\_VX-520 / PAX\_Q80

## 1 ※ Installation Model list

A7-Payment_bracket Fit Model (790AD21509000)	
Model(Payment)	Apply Screw (Model / Bracket)
Verifone_VX-805A	M2x6L - 2pcs / M3x6L - 3pcs
Ingenico iUC285	M4x6L - 2pcs / M3x6L - 3pcs
Ingenico iPP320	M2.6x6L_Washer - 1pcs / M3x6L - 3pcs
IDTECH AUGUSTA	M3x6L - 2pcs / M3x6L - 3pcs

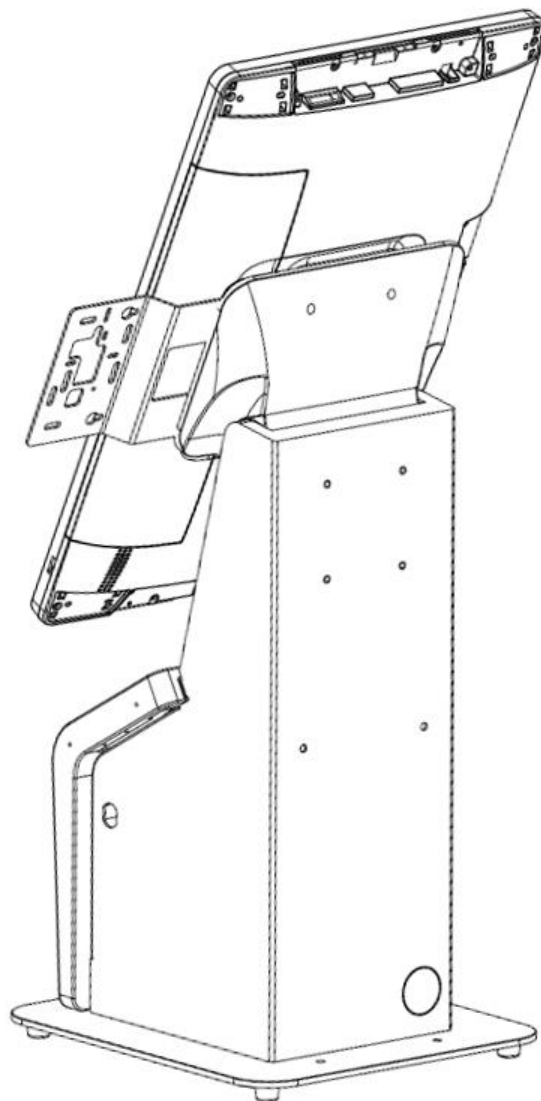

- 1.1** Release 2 pcs **M2.5x6L\_Screw** on A7\_I/O\_Cover, then Assemble I/O\_Cover and **A7-Payment\_Bracket** with 3 pcs M3x6L\_screw.

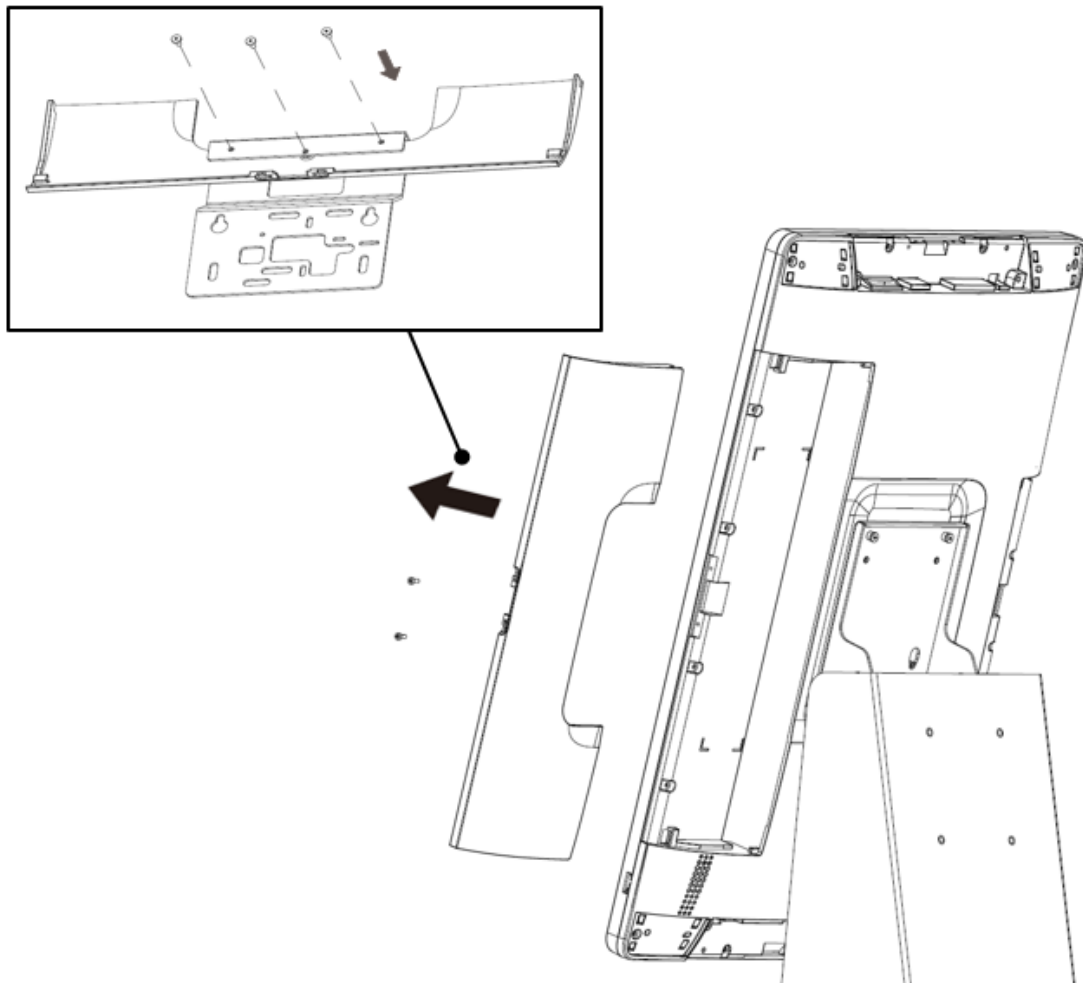


Ticked P/N Item are applicable for above illustration.

- ✓ 910K19PS11700 Counter-top stand
- 910K19PS11701 Counter-top+Plate
- 910K19PS12700 Floor stand
- 910K19PS12701 Floor Stand+Wheels+Holder

## **1.2** Place Back I/O\_Cover and Fasten it with 2 pcs **M2.5x6L\_Screw** on A7.

Place Payment terminal On **A7-Payment\_Bracket** with the Screw.

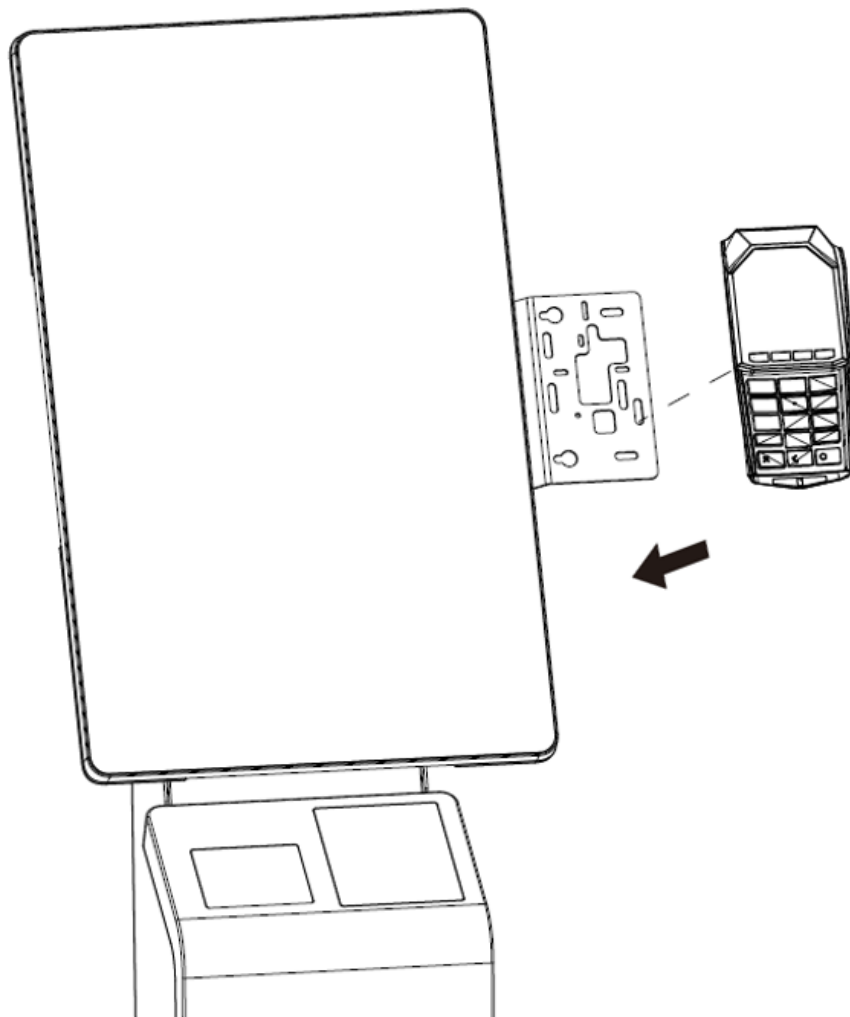


Ticked P/N Item are applicable for above illustration.

- ✓ 910K19PS11700 Counter-top stand
- 910K19PS11701 Counter-top+Plate
- 910K19PS12700 Floor stand
- 910K19PS12701 Floor Stand+Wheels+Holder


## 2 ※ Installation Model list

Payment_bracket_Option_ <b>A</b> Fit Model (790PS11702102)	
Model(Payment)	Apply Screw (Model / Bracket)
Verifone_VX-805A	M2x6L - 2pcs / Nylok_M3x4L - 4pcs
Ingenico iUC285	M4x6L - 2pcs / Nylok_M3x4L - 4pcs
Ingenico iPP320	M2.6x6L_Washer - 1pcs / Nylok_M3x4L - 4pcs
IDTECH AUGUSTA	Nylok_M3x4L - 1pcs / Nylok_M3x4L - 4pcs

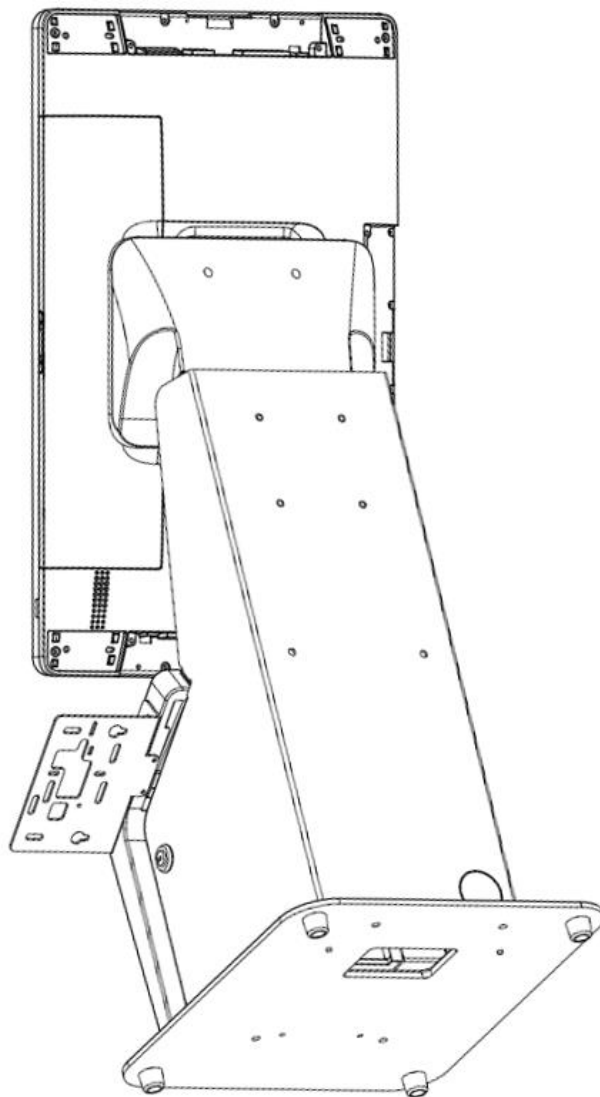




## 2.1 Assemble **Payment\_bracket\_Option\_A** and Front\_Door with 4 pcs M3x6L\_screw.

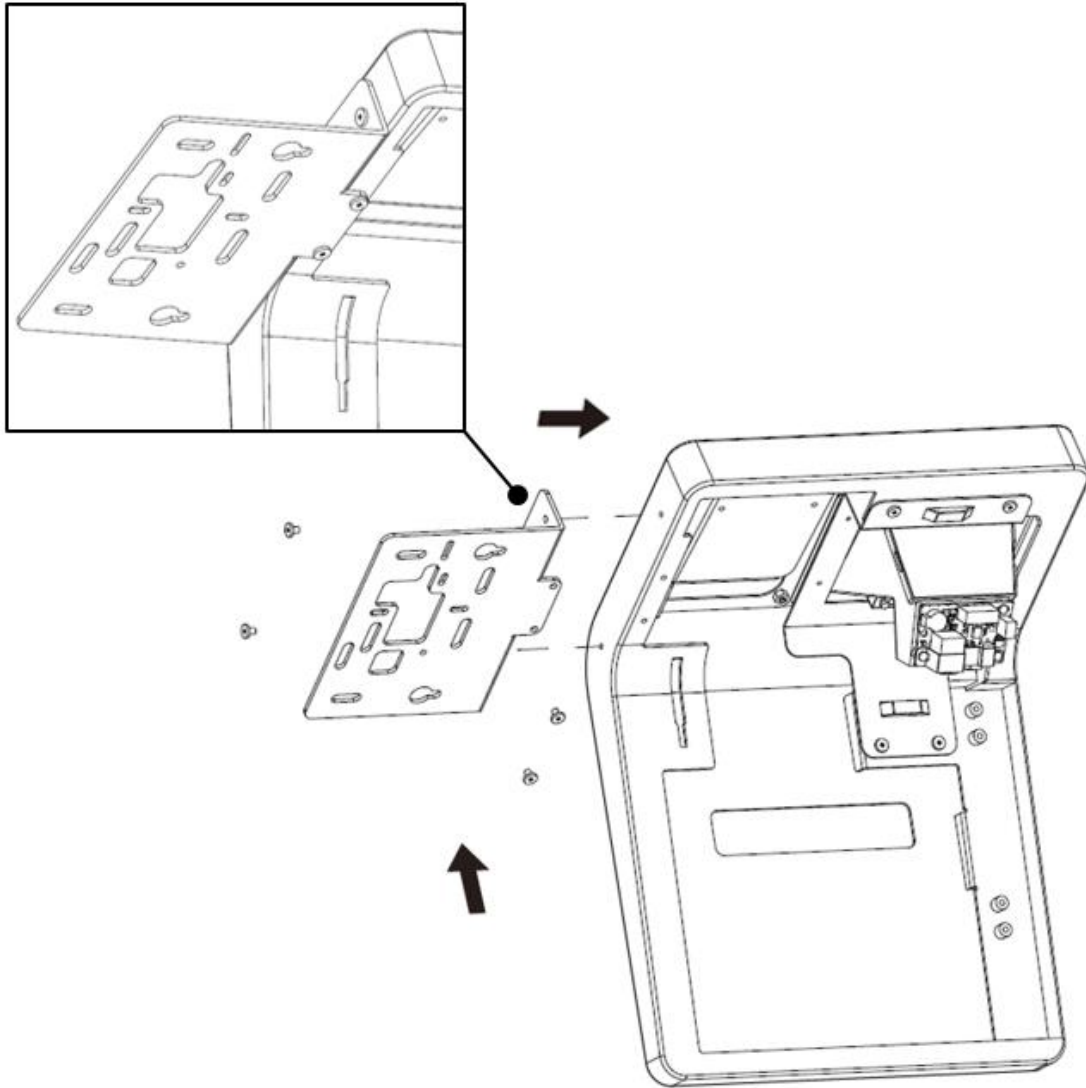

Ticked P/N Item are applicable for above illustration.

- ✓ 910K19PS11700 Counter-top stand
- 910K19PS11701 Counter-top+Plate
- 910K19PS12700 Floor stand
- 910K19PS12701 Floor Stand+Wheels+Holder

## **2.2** Place Payment terminal On **Payment\_bracket\_Option\_A** with the Screw.

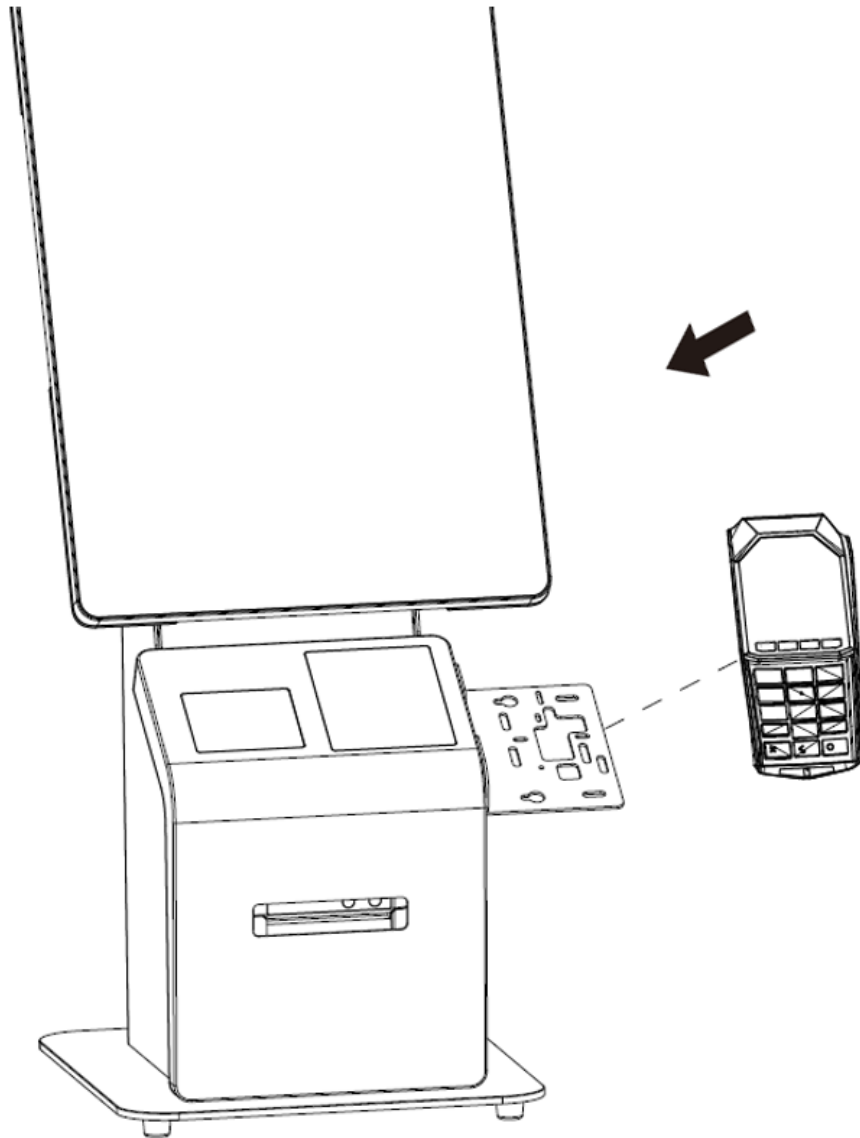


Ticked P/N Item are applicable for above illustration.


- ✓ 910K19PS11700 Counter-top stand
- 910K19PS11701 Counter-top+Plate
- 910K19PS12700 Floor stand
- 910K19PS12701 Floor Stand+Wheels+Holder

## 3 ※ Installation Model list

Payment_Bracket_Option_ <b>B</b> Fit Model(790PS11702100)	
Model(Payment)	Apply Screw (Model / Bracket)
Verifone_VX-520	M3x9L_Washer - 2pcs / Nylok_M3x4L - 4pcs
PAX_Q80	M3x9L_Washer - 2pcs / Nylok_M3x4L - 4pcs

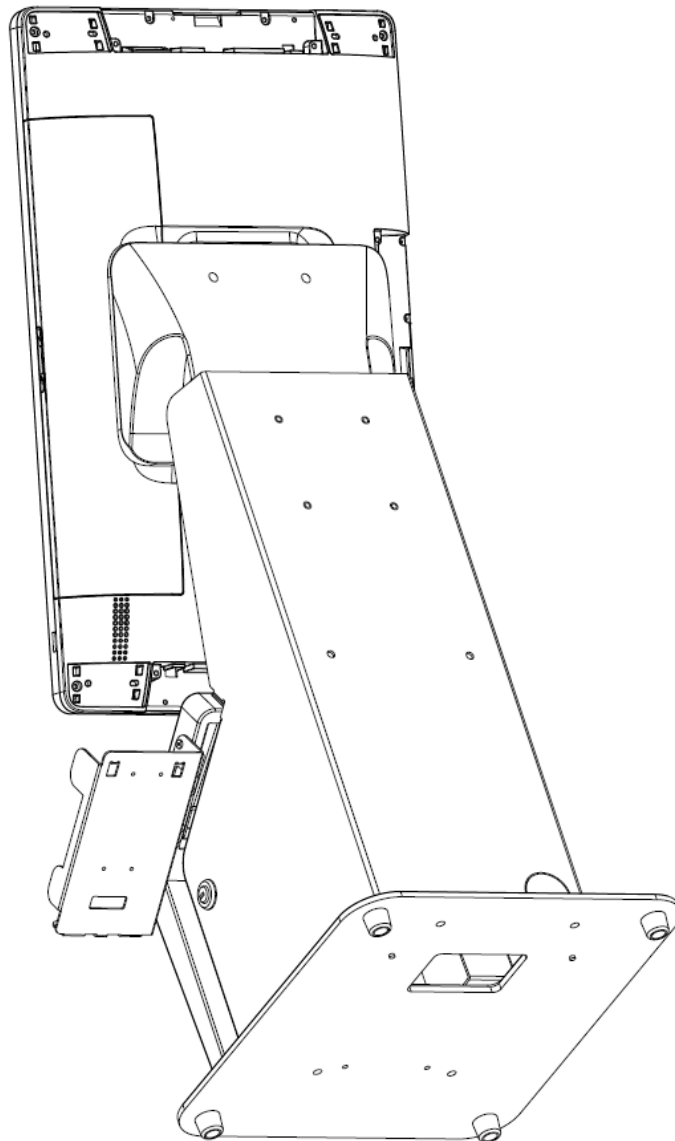


## 3.1 Assemble **Payment\_bracket\_Option\_B** and Front\_Door with 4 pcs M3x6L\_screw.

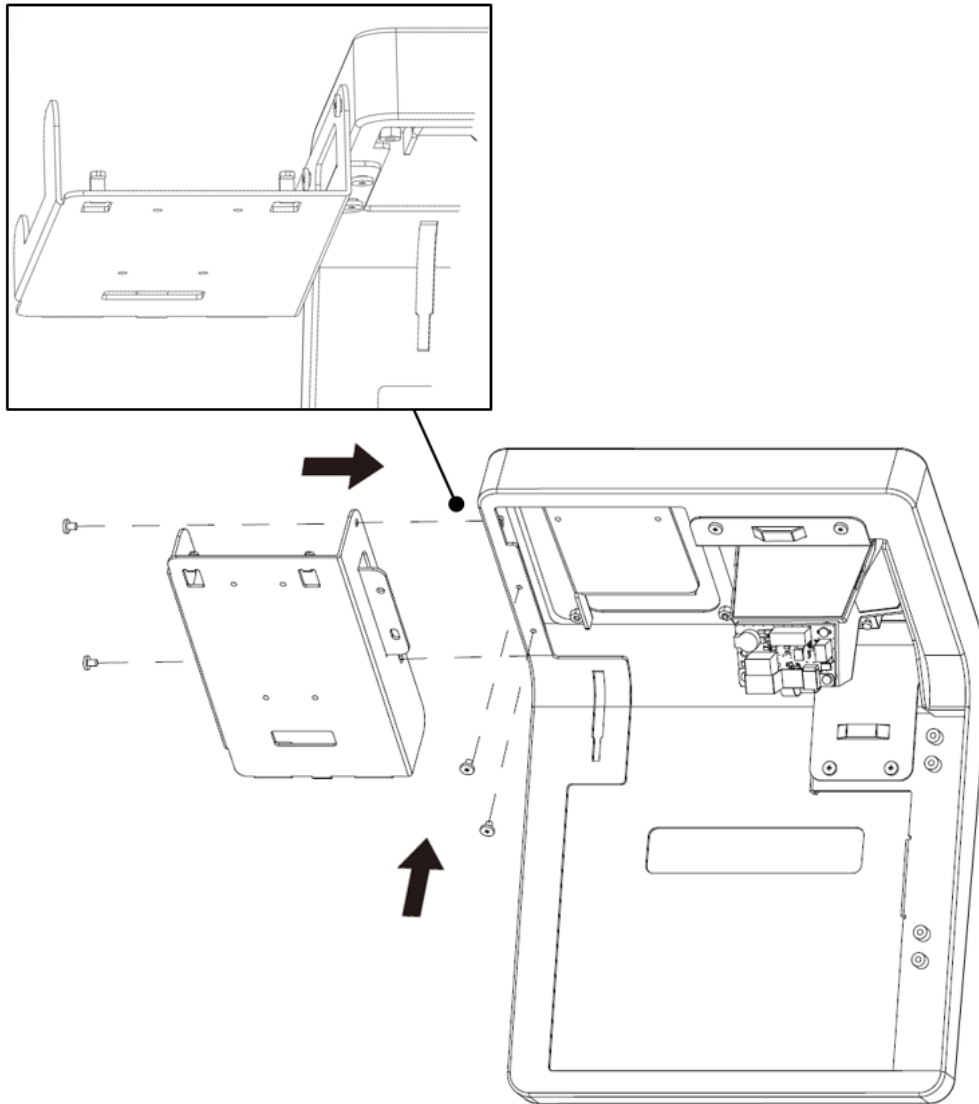

Ticked P/N Item are applicable for above illustration.

- ✓ 910K19PS11700 Counter-top stand
- 910K19PS11701 Counter-top+Plate
- 910K19PS12700 Floor stand
- 910K19PS12701 Floor Stand+Wheels+Holder

## 3.2 Place Payment terminal On **Payment\_bracket\_Option\_B** with the Screw.

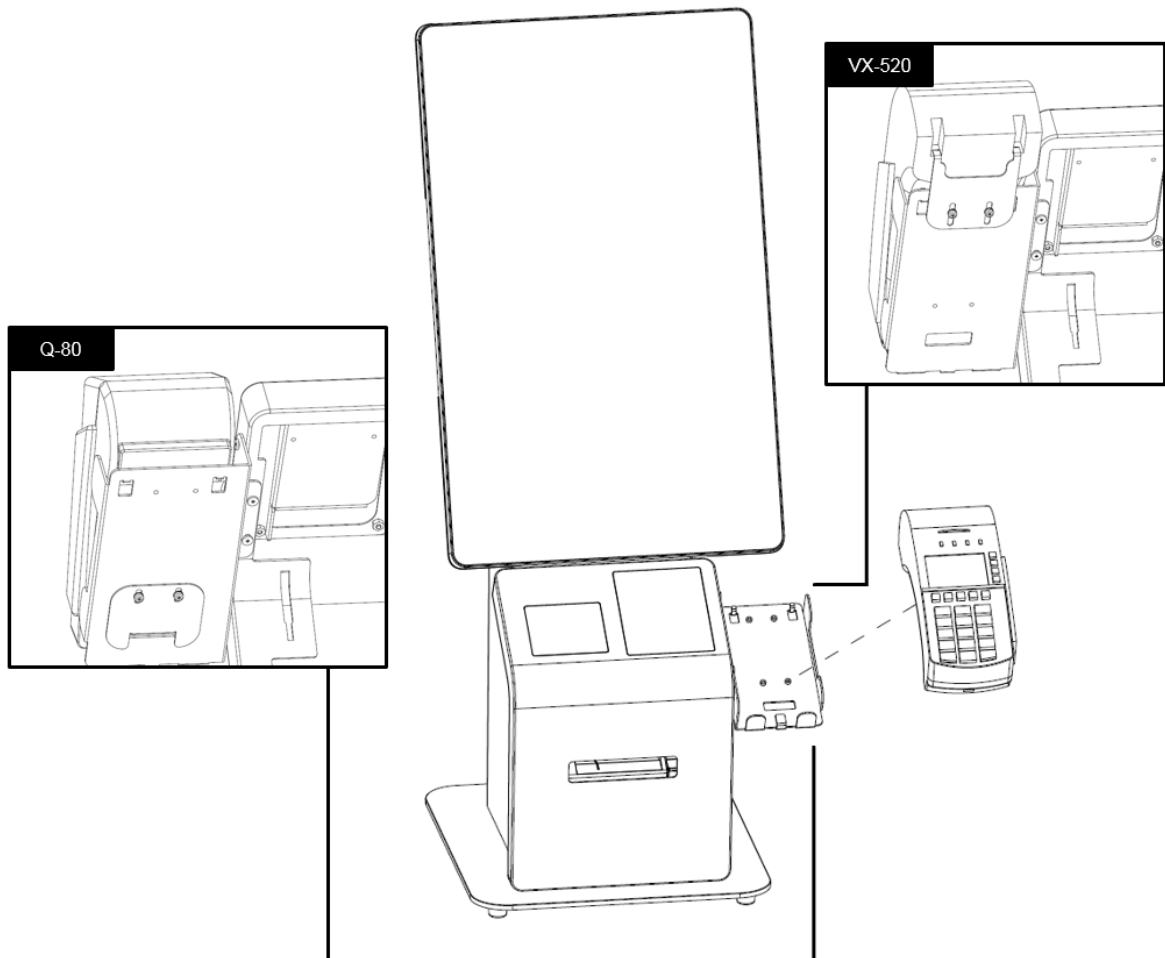

Ticked P/N Item are applicable for above illustration.

- ✓ 910K19PS11700 Counter-top stand
- 910K19PS11701 Counter-top+Plate
- 910K19PS12700 Floor stand
- 910K19PS12701 Floor Stand+Wheels+Holder